



FINAL PRODUCT/PROCESS CHANGE NOTIFICATION #20324K-AGeneric Copy

Issue Date: 25-Apr-2014**TITLE:** Assembly and Test site transfer from Kanto Sanyo Semiconductors Co., Ltd to ON Semiconductor SSMP Philippines Corporation (Group 11)**PROPOSED FIRST SHIP DATE:** 01-Sep-2014**AFFECTED CHANGE CATEGORY(S):** Assembly and Test site**FOR ANY QUESTIONS CONCERNING THIS NOTIFICATION:**

Contact your local ON Semiconductor Sales Office or
<toshiitsu.igarashi@onsemi.com><takeshi2.hoshino@onsemi.com> <shinya.okada@onsemi.com>
<ikuo.saeaki@onsemi.com><Toshimitsu.Namiki@onsemi.com><naoki.koyama@onsemi.com>
<takehito.tsukui@onsemi.com> <keiji.ueda@onsemi.com>

SAMPLES: Contact your local ON Semiconductor Sales Office or <Takakshi.Asami@onsemi.com>**ADDITIONAL RELIABILITY DATA:** Available

Contact your local ON Semiconductor Sales Office or <Kazutoshi.Kitazume@onsemi.com>
<Satoru.Fujinuma@onsemi.com>

NOTIFICATION TYPE:

Final Product/Process Change Notification (FPCN)

Final change notification sent to customers. FPCNs are issued at least 90 days prior to implementation of the change.

ON Semiconductor will consider this change approved unless specific conditions of acceptance are provided in writing within 30 days of receipt of this notice. To do so, contact <quality@onsemi.com>.

DESCRIPTION AND PURPOSE:

As a part of restructuring of semiconductor production infrastructure, Hanyu plant of Kanto Sanyo Semiconductors Co., Ltd will be closed at the end of June, 2014 and have been started preparation for end of production.

In order to continue supply of applicable products under this condition, the products and the equipments will be transferred to ON Semiconductor SSMP Philippines Corporation.


The package will be changed from MFP30SD/MFP36SD to MFP30SDJ/MFP36SDJ which have been manufacturing as standard product in SSMP. This affects for the lead width. In IPCN, it was announced the product name will be changed in accordance with the package change. However, it was decided the product name will NOT be changed finally.



FINAL PRODUCT/PROCESS CHANGE NOTIFICATION #20324K-A


MFP30SD → MFP30SDJ

Lead width is changed from 0.40mm to 0.35mm.

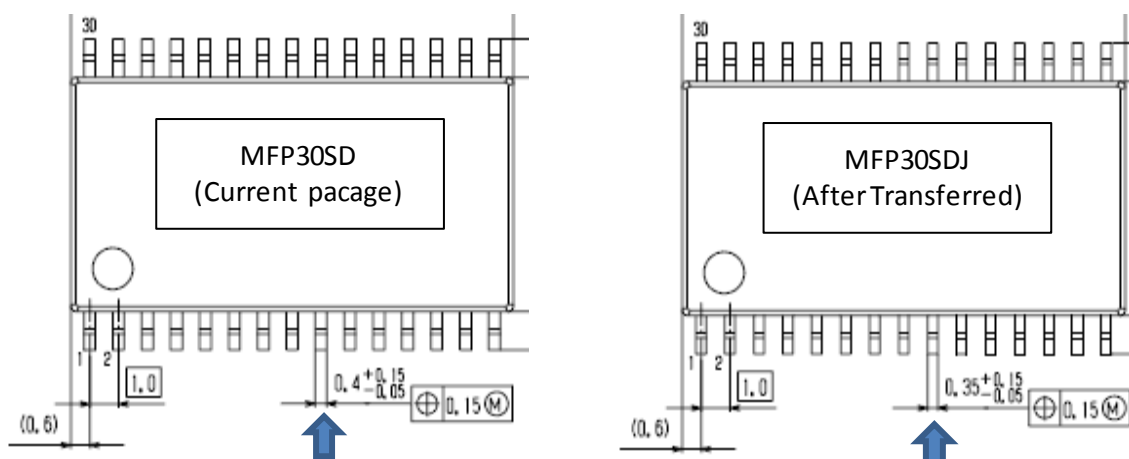

MFP36DS → MFP36SDJ

Lead width is changed from 0.40mm to 0.30mm.

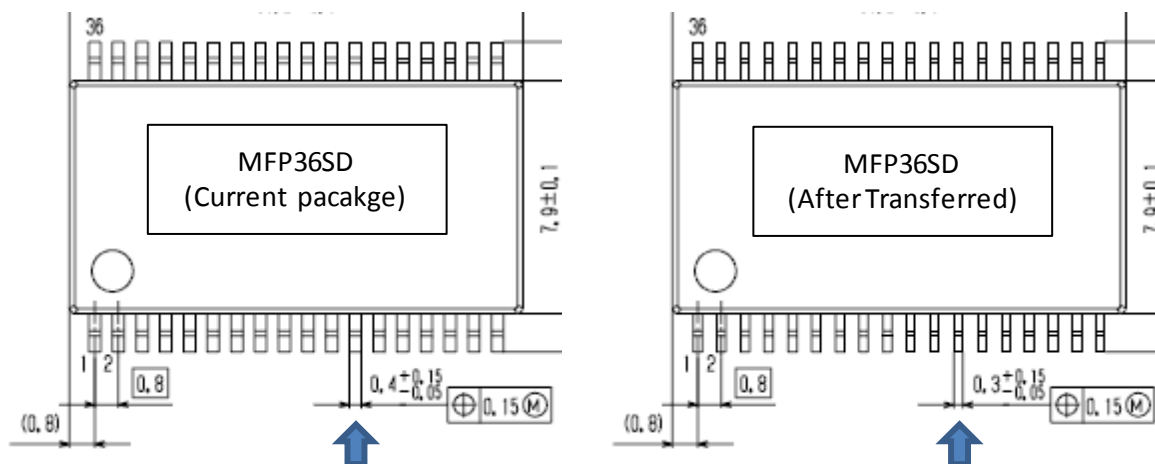



FINAL PRODUCT/PROCESS CHANGE NOTIFICATION #20324K-A

RELIABILITY DATA SUMMARY:

Package name : MFP30SDJ / MFP36SDJ

Test Items	Test Condition	Test Time	Results
Temperature Humidity Bias *	Ta=85degC, RH=85%, Vcc=Recommended	1000hrs	Pass
Temperature Humidity Storage *	Ta=85degC, RH=85%	1000hrs	Pass
Temperature Cycle *	Ta=-65degC(30min) ⇔ Ta=150degC (30min)	100cycles	Pass
Pressure Cooker *	Ta=121degC, RH=100% ,205kPa	100hrs	Pass
High Temperature Storage	Ta=150degC	1000hrs	Pass
Resistance to Soldering heat (Reflow Soldering)	255degC, 10s (Peak 260degC)	2times	Pass
Solderability	245degC, 3s(with Flux) Soldering area, 95% over(Sn-3.0Ag-0.5Cu)	1time	Pass

Notes:

The test items with * mark are put into operation after the reflow soldering (at 255degC for 10seconds) -> SMD
 Temperature Humidity Bias Test: PD>=0.1W -> Intermittent power application consists of 1h ON and 3h OFF.

Judgment Criteria : Judgment Criteria are due to the limits of the electrical characteristics in the detail specification.
 (Except for Solderability)

ELECTRICAL CHARACTERISTIC SUMMARY:

There is no change in the electrical performance. Datasheet specifications remain unchanged.

CHANGED PART IDENTIFICATION:

Products manufactured at SSMP will be marked with 'L7' preceding the Serial No. on shipping label.

List of affected General Parts:

LB11820M-TLM-E
 LB1813M-TLM-E