

# 2N5302

## High-Power NPN Silicon Transistor

High-power NPN silicon transistors are for use in power amplifier and switching circuits applications.

### Features

- Low Collector–Emitter Saturation Voltage –  
 $V_{CE(sat)} = 0.75 \text{ Vdc (Max) @ } I_C = 10 \text{ Adc}$
- Pb–Free Package is Available\*

### MAXIMUM RATINGS (Note 1) ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	$V_{CEO}$	60	Vdc
Collector–Base Voltage	$V_{CB}$	60	Vdc
Collector Current – Continuous (Note 2)	$I_C$	30	Adc
Base Current	$I_B$	7.5	Adc
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	200 1.14	W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	–65 to +200	$^\circ\text{C}$

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction–to–Case	$\theta_{JC}$	0.875	$^\circ\text{C/W}$
Thermal Resistance, Case–to–Ambient	$\theta_{CA}$	34	$^\circ\text{C/W}$

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Indicates JEDEC Registered Data.
2. Pulse Test: Pulse Width = 5  $\mu\text{s}$ , Duty Cycle  $\leq 10\%$ .

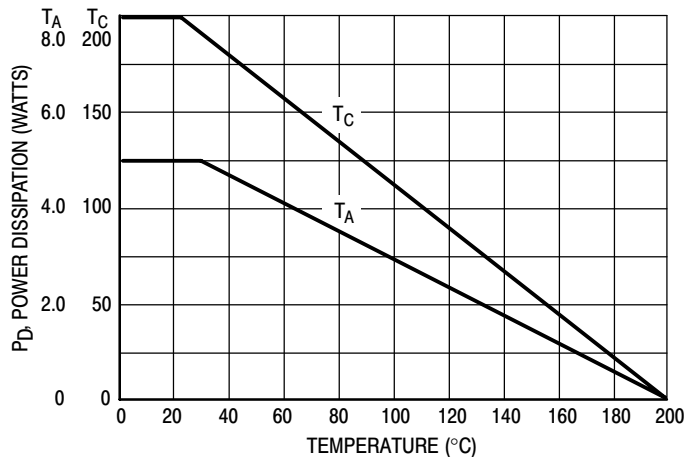


Figure 1. Power Temperature Derating Curve


\*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



**ON Semiconductor®**

<http://onsemi.com>

**30 AMPERES  
POWER TRANSISTOR  
NPN SILICON  
60 VOLTS, 200 WATTS**



TO–204AA (TO–3)  
CASE 1–07  
STYLE 1

### MARKING DIAGRAM



2N5302 = Device Code  
 G = Pb–Free Package  
 A = Location Code  
 YY = Year  
 WW = Work Week  
 MEX = Country of Origin

### ORDERING INFORMATION

Device	Package	Shipping
2N5302	TO–204	100 Units/Tray
2N5302G	TO–204 (Pb–Free)	100 Units/Tray

**ELECTRICAL CHARACTERISTICS** ( $T_C = 25^\circ\text{C}$  unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
<b>OFF CHARACTERISTICS</b> (Note 3)				
Collector–Emitter Sustaining Voltage (Note 4) ( $I_C = 200\text{ mA}$ , $I_B = 0$ )	$V_{CEO(sus)}$	60	–	Vdc
Collector Cutoff Current ( $V_{CE} = 60\text{ Vdc}$ , $I_B = 0$ )	$I_{CEO}$	–	5.0	mAdc
Collector Cutoff Current ( $V_{CE} = 60\text{ Vdc}$ , $V_{EB(off)} = 1.5\text{ Vdc}$ )	$I_{CEX}$	–	1.0	mAdc
Collector Cutoff Current ( $V_{CE} = 60\text{ Vdc}$ , $V_{EB(off)} = 1.5\text{ Vdc}$ , $T_C = 150^\circ\text{C}$ )	$I_{CEX}$	–	10	mAdc
Collector Cutoff Current ( $V_{CB} = 80\text{ Vdc}$ , $I_E = 0$ )	$I_{CBO}$	–	1.0	mAdc
Emitter Cutoff Current ( $V_{BE} = 5.0\text{ Vdc}$ , $I_C = 0$ )	$I_{EBO}$	–	5.0	mAdc

**ON CHARACTERISTICS**

DC Current Gain (Note 4) *( $I_C = 1.0\text{ Adc}$ , $V_{CE} = 2.0\text{ Vdc}$ ) *( $I_C = 15\text{ Adc}$ , $V_{CE} = 2.0\text{ Vdc}$ ) ( $I_C = 30\text{ Adc}$ , $V_{CE} = 4.0\text{ Vdc}$ )	$h_{FE}$	40 15 5.0	– 60 –	–
*Collector–Emitter Saturation Voltage (Note 4) ( $I_C = 10\text{ Adc}$ , $I_B = 1.0\text{ Adc}$ ) ( $I_C = 20\text{ Adc}$ , $I_B = 2.0\text{ Adc}$ ) <sup>2</sup> ( $I_C = 30\text{ Adc}$ , $I_B = 6.0\text{ Adc}$ )	$V_{CE(sat)}$	– – –	0.75 2.0 3.0	Vdc
*Base Emitter Saturation Voltage (Note 4) ( $I_C = 10\text{ Adc}$ , $I_B = 1.0\text{ Adc}$ ) ( $I_C = 15\text{ Adc}$ , $I_B = 1.5\text{ Adc}$ ) ( $I_C = 20\text{ Adc}$ , $I_B = 2.0\text{ Adc}$ )	$V_{BE(sat)}$	– – –	1.7 1.8 2.5	Vdc
*Base–Emitter On Voltage (Note 4) ( $I_C = 15\text{ Adc}$ , $V_{CE} = 2.0\text{ Vdc}$ ) ( $I_C = 30\text{ Adc}$ , $V_{CE} = 4.0\text{ Vdc}$ )	$V_{BE(on)}$	– –	1.7 3.0	Vdc

**DYNAMIC CHARACTERISTICS** (Note 3)

Current–Gain – Bandwidth Product ( $I_C = 1.0\text{ Adc}$ , $V_{CE} = 10\text{ Vdc}$ , $f = 1.0\text{ MHz}$ )	$f_T$	2.0	–	MHz
Small–Signal Current Gain ( $I_C = 1.0\text{ Adc}$ , $V_{CE} = 10\text{ Vdc}$ , $f = 1.0\text{ kHz}$ )	$h_{fe}$	40	–	–

**SWITCHING CHARACTERISTICS** (Note 3)

Rise Time	$(V_{CC} = 30\text{ Vdc}$ , $I_C = 10\text{ Adc}$ , $I_{B1} = I_{B2} = 1.0\text{ Adc}$ )	$t_r$	–	1.0	$\mu\text{s}$
Storage Time		$t_s$	–	2.0	$\mu\text{s}$
Fall Time		$t_f$	–	1.0	$\mu\text{s}$

- 3. Indicates JEDEC Registered Data.
- 4. Pulse Width  $\leq 300\ \mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

**SWITCHING TIME EQUIVALENT TEST CIRCUITS**

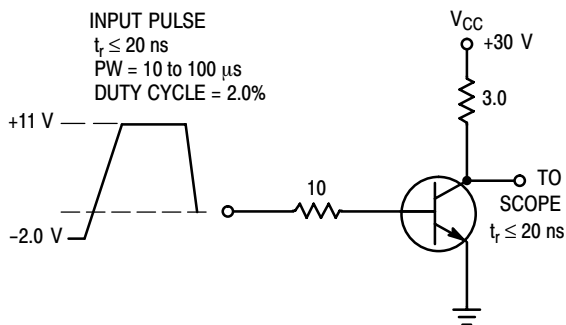


Figure 2. Turn–On time

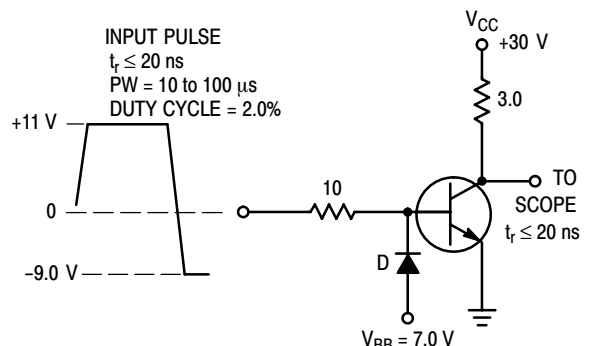


Figure 3. Turn–Off time

# 2N5302

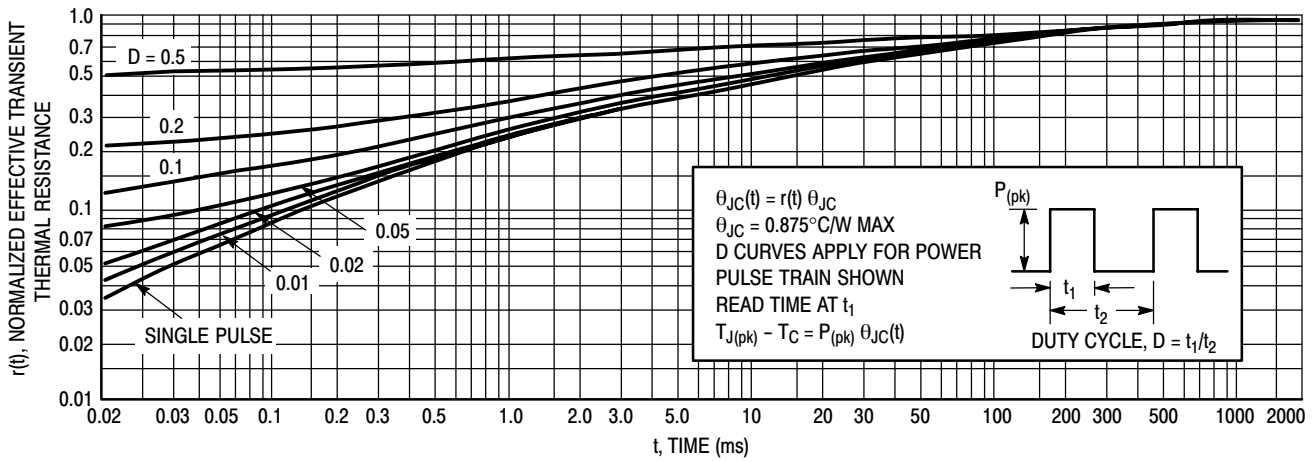


Figure 4. Thermal Response

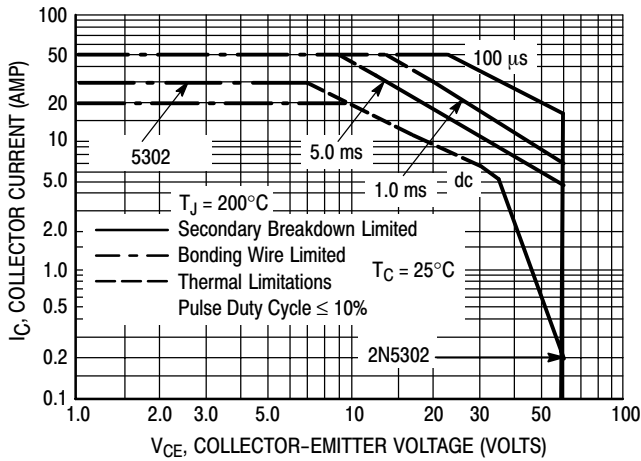


Figure 5. Active-Region Safe Operating Area

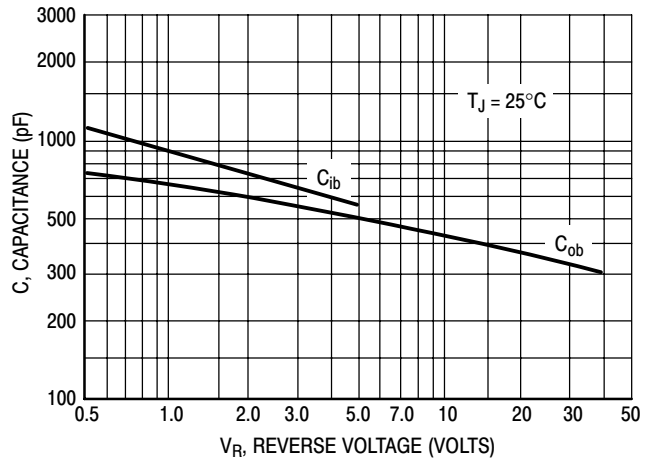


Figure 6. Capacitance versus Voltage

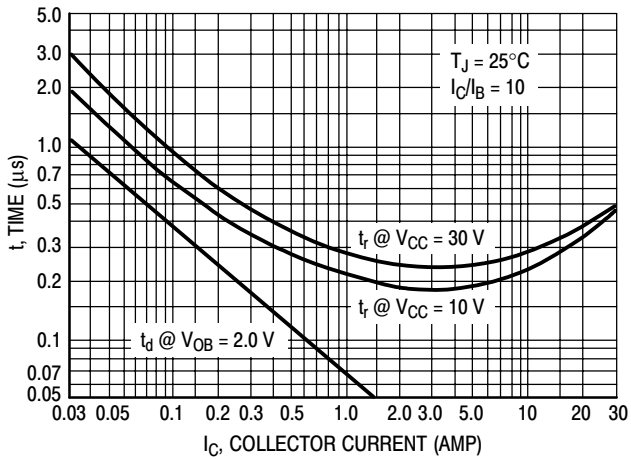


Figure 7. Turn-On Time

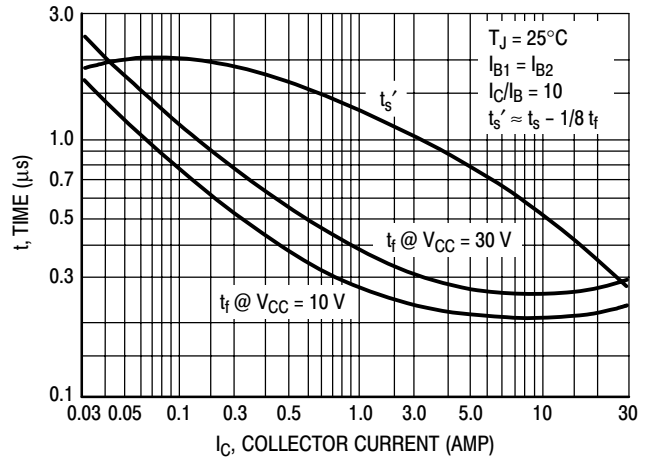


Figure 8. Turn-Off Time

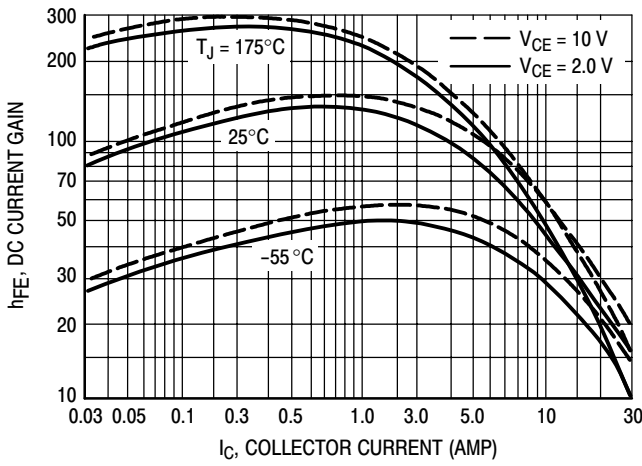


Figure 9. DC Current Gain

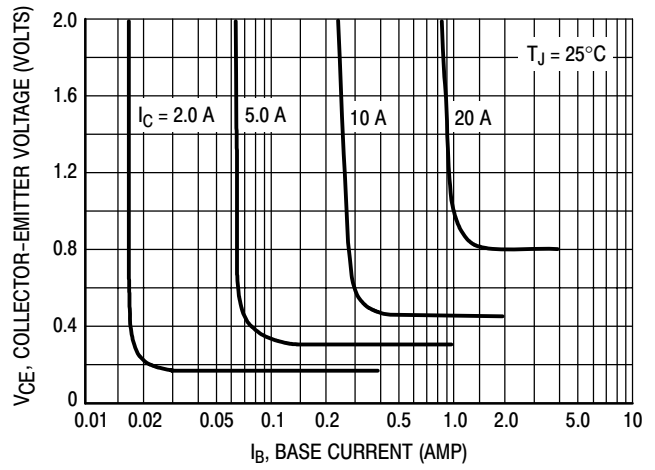


Figure 10. Collector Saturation Region

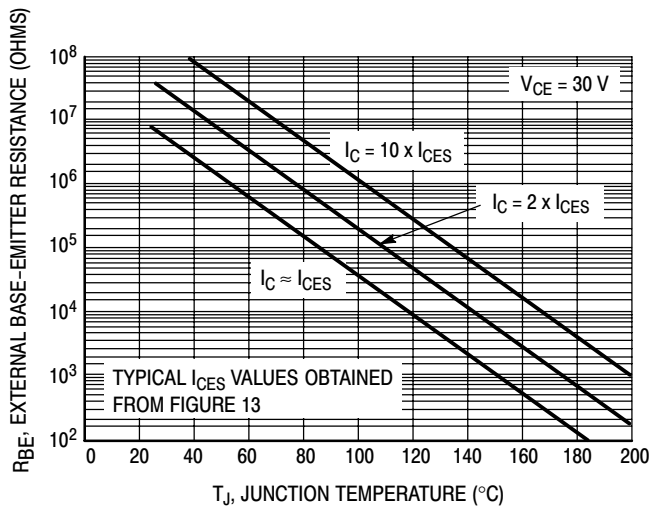


Figure 11. Effects of Base-Emitter Resistance

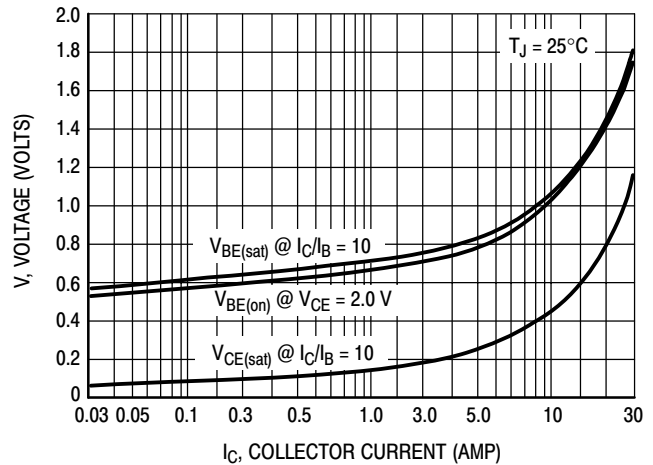


Figure 12. "On" Voltages

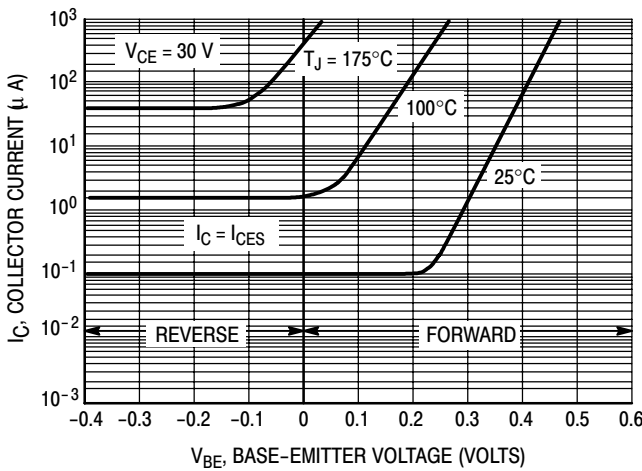


Figure 13. Collector Cut-Off Region

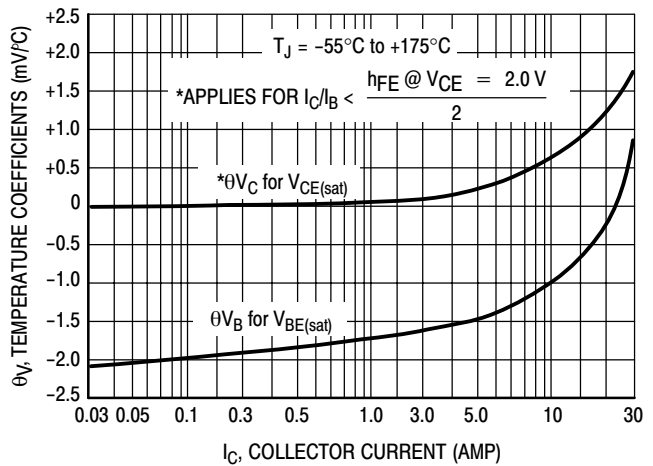


Figure 14. Temperature Coefficients



**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)