

# LC87F7NJ2A



CMOS LSI

## 8-bit Microcontroller with LCD Controller Driver 192K-byte Flash ROM / 8K-byte RAM / 100-pin

ON Semiconductor®


www.onsemi.com

### Features


- LCD Driver 4COM × 54SEG
- Infrared Remote Control Receiver Circuit × 2
- Full duplex UART × 2

### Performance

- Minimum Bus Cycle Time  
56ns (CF=18MHz)
- Minimum Instruction Cycle Time (Tcyc)  
167ns (CF=18MHz)
- Operating Supply Voltage  
2.7V to 3.6V
- Operating Ambient Temperature  
-40°C to +85°C

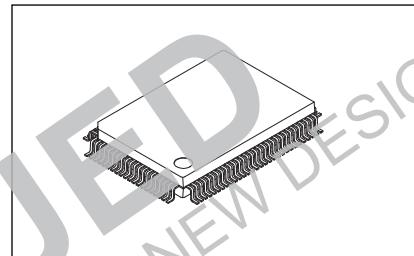


QIP100E(14X20)

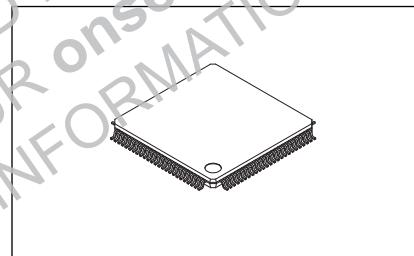

TQFP100(14X14)  
[ Under Development ]

### Function Descriptions

- Ports
  - I/O Ports 29
  - LCD Common Ports 4
  - LCD Segment Ports 54 (I/O port combined use)
  - Bias Power Source For LCD 3
  - Power Pins (VSS1, VDD1) 6
- Timer × 8
  - Timer 0 : 16-bit timer/counter with capture registers
  - Timer 1 : 16-bit timer that supports PWM/toggle outputs
  - Timer 4 : 8-bit timer with a 6-bit prescaler
  - Timer 5 : 8-bit timer with a 6-bit prescaler
  - Timer 6 : 8-bit timer with a 6-bit prescaler (with toggle output)
  - Timer 7 : 8-bit timer with a 6-bit prescaler (with toggle output)
  - Timer 8 : 16-bit timer with an 8-bit prescaler
  - Base timer
- Full duplex UART × 2
- Infrared Remote Control Receiver Circuit × 2

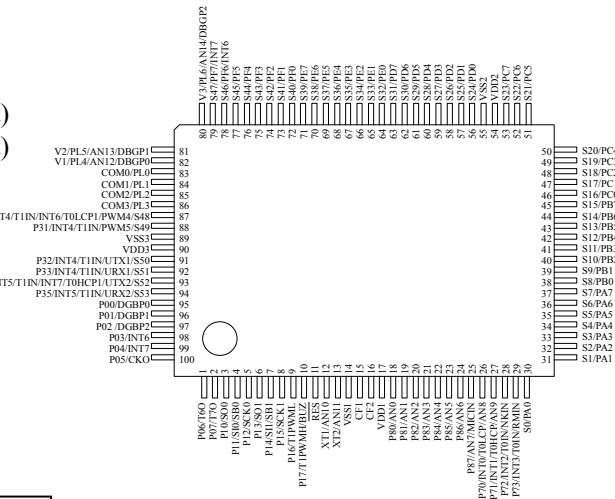

### Application

- AV apparatus
- Household appliance mounted with LCD panel

\* This product is licensed from Silicon Storage Technology, Inc. (USA).

Pin Assignment : QIP100E(14x20)  
[ Top view ]

### ORDERING INFORMATION

See detailed ordering and shipping information on page 28 of this data sheet.

## Function Details

### ■ Ports

- Normal withstand voltage I/O ports

Ports whose I/O direction can be designated in 1 bit units : 29 (P0n, P1n, P70 to P73, P8n, XT2)

- Normal withstand voltage input port

: 1 (XT1)

- LCD ports

Segment output : 54 (S00 to S53)

Common output : 4 (COM0 to COM3)

Bias power sources for LCD driver : 3 (V1 to V3)

#### Other functions

Input/output ports : 54 (P3n, PAn, PBn, PCn, PDn, PEn, PFn)

Input ports : 7 (PLn)

- Dedicated oscillator ports

: 2 (CF1, CF2)

- Reset pins

: 1 (RES)

- Power pins

: 6 (VSS1 to VSS3, VDD1 to VDD3)

### ■ LCD Controller

1) Seven display modes are available (static, 1/2, 1/3, 1/4 duty × 1/2, 1/3 bias)

2) Segment output and common output can be switched to general-purpose input/output ports

### ■ Small Signal Detection (MIC signals etc.)

1) Counts pulses with a level which is greater than a preset value

2) 2-bit counter

### ■ Timers

- Timer 0 : 16-bit timer/counter with two capture registers.

Mode 0 : 8-bit timer with an 8-bit programmable prescaler (with two 8-bit capture registers) × 2 channels

Mode 1 : 8-bit timer with an 8-bit programmable prescaler (with two 8-bit capture registers) + 8-bit counter  
(with two 8-bit capture registers)

Mode 2 : 16-bit timer with an 8-bit programmable prescaler (with two 16-bit capture registers)

Mode 3 : 16-bit counter (with two 16-bit capture registers)

- Timer1 : 16-bit counter timer that supports PWM/toggle outputs

Mode 0 : 8-bit timer with an 8-bit prescaler (with toggle outputs) + 8-bit timer counter with an 8-bit prescaler  
(with toggle outputs)

Mode 1 : 8-bit PWM with an 8-bit prescaler × 2 channels

Mode 2 : 16-bit counter timer with an 8-bit prescaler (with toggle outputs)  
(toggle outputs also possible from the lower-order 8 bits)

Mode 3 : 16-bit timer with an 8-bit prescaler (with toggle outputs) (The lower-order 8 bits can be used as PWM.)

- Timer4 : 8-bit timer with a 6-bit prescaler

- Timer5 : 8-bit timer with a 6-bit prescaler

- Timer6 : 8-bit timer with a 6-bit prescaler (with toggle output)

- Timer7 : 8-bit timer with a 6-bit prescaler (with toggle output)

- Timer8 : 16-bit timer

Mode 0 : 8-bit timer with an 8-bit prescaler × 2 channels

Mode 1 : 16-bit timer with an 8-bit prescaler

- Base Timer

1) The clock is selectable from the subclock (32.768kHz crystal oscillation), system clock, and timer 0 prescaler output.

2) Interrupts programmable in 5 different time schemes

- Day and time counter

1) Used with a base timer, the day and time counter can be used as a 65000 day + minute + second counter.

## ■ High-speed Clock Counter

- 1) Can count clocks with a maximum clock rate of 20MHz (at a main clock of 10MHz).
- 2) Can generate output real-time.

## ■ Serial Interfaces

- SIO0 : 8-bit synchronous serial interface

1) LSB first/MSB first made selectable

2) Built-in 8-bit baudrate generator (maximum transfer clock cycle = 4/3tCYC)

3) Automatic continuous data transmission (1 to 256 bits specifiable in 1-bit units, suspension and resumption of data transmission possible in 1-byte units)

- SIO1 : 8-bit asynchronous/synchronous serial interface

Mode 0 : Synchronous 8-bit serial I/O (2- or 3-wire configuration, 2 to 512 tCYC transfer clocks)

Mode 1 : Asynchronous serial I/O (half-duplex, 8 data bits, 1 stop bit, 8 to 2048 tCYC baudrates)

Mode 2 : Bus mode 1 (start bit, 8 data bits, 2 to 512 tCYC transfer clocks)

Mode 3 : Bus mode 2 (start detect, 8 data bits, stop detect)

## ■ UART1

- Full duplex
- 7/8/9 bit data bits selectable
- 1 stop bit (2 bits in continuous data transmission)
- Built-in baudrate generator

## ■ UART2

- Full duplex
- 7/8/9 bit data bits selectable
- 1 stop bit (2 bits in continuous data transmission)
- Built-in baudrate generator

## ■ AD Converter : 12 bits × 15 channels

## ■ PWM : Multi frequency 12-bit PWM × 2 channels

## ■ Infrared Remote Control Receiver Circuit1

- 1) Noise reduction function (Time constant of noise reduction filter : approx. 120μs, when selecting a 32.768kHz crystal oscillator as a reference clock)
- 2) Supporting reception formats with a guide-pulse of half-clock/clock/none.
- 3) Determines a end of reception by detecting a no-signal periods (No carrier).  
(Supports same reception format with a different bit length.)
- 4) X'tal HOLD mode cancellation function

## ■ Infrared Remote Control Receiver Circuit2

- 1) Noise reduction function

(Time constant of noise reduction filter: approx. 120μs, when selecting a 32.768kHz crystal oscillator as a reference clock.)

- 2) Supporting reception formats with a guide-pulse of half-clock/clock/none.

- 3) Determines a end of reception by detecting a no-signal periods (No carrier).  
(Supports same reception format with a different bit length.)

- 4) X'tal HOLD mode cancellation function

## ■ Watchdog Timer

- 1) External RC watchdog timer
- 2) Interrupt and reset signals selectable

## ■ Clock Output Function

- 1) Can output selected oscillation clock 1/1, 1/2, 1/4, 1/8, 1/16, 1/32, or 1/64 as a system clock.
- 2) Can output the source oscillation clock for the sub clock.

## ■ Interrupt Source Flags

- 31 sources, 10 vector addresses

- 1) Provides three levels (low (L), high (H), and highest (X)) of multiplex interrupt control. Any interrupt requests of the level equal to or lower than the current interrupt are not accepted.
- 2) When interrupt requests to two or more vector addresses occur at the same time, the interrupt of the highest level takes precedence over the other interrupts. For interrupts of the same level, the interrupt into the smallest vector address takes precedence.

No.	Vector Address	Level	Interrupt Source
1	00003H	X or L	INT0
2	0000BH	X or L	INT1
3	00013H	H or L	INT2/T0L/INT4/remote control receiver1
4	0001BH	H or L	INT3/base timer/INT5/ remote control receiver2
5	00023H	H or L	T0H/INT6
6	0002BH	H or L	T1L/T1H/INT7
7	00033H	H or L	SIO0/UART1 receive/ UART2 receive/T8L/T8H
8	0003BH	H or L	SIO1/UART1 transmit/ UART2 transmit
9	00043H	H or L	ADC/MIC/T6/T7/PWM4/PWM5
10	0004BH	H or L	Port 0/T4/T5

- Priority levels X > H > L
- Of interrupts of the same level, the one with the smallest vector address takes precedence.

## • IFLG (List of interrupt source flag function)

- 1) Shows a list of interrupt source flags that caused a branching to a particular vector address.

## ■ Subroutine Stack Levels

- 4096/2048 levels maximum (The stack is allocated in RAM.)

## ■ High-speed Multiplication/Division Instructions

- 16 bits × 8 bits (5 tCYC execution time)
- 24 bits × 16 bits (12 tCYC execution time)
- 16 bits ÷ 8 bits (8 tCYC execution time)
- 24 bits ÷ 16 bits (12 tCYC execution time)

## ■ Oscillation Circuits

- RC oscillation circuit (internal) : For system clock
- CF oscillation circuit : For system clock, with internal Rf and external Rd
- Crystal oscillation circuit : For low-speed system clock, with internal Rf and external Rd
- Multifrequency RC oscillation circuit (internal) : For system clock

1) Adjustable in ±4% (typ) increments from the selected center frequency.

2) Measures the frequency of the source oscillation clock using the input signal from XT1 as the reference.

## ■ System Clock Divider Function

- Can run on low current.
- The minimum instruction cycle selectable from 300ns, 600ns, 1.2μs, 2.4μs, 4.8μs, 9.6μs, 19.2μs, 38.4μs, and 76.8μs (at a main clock rate of 10MHz).

## ■ Standby Function

- HALT mode : Halts instruction execution while allowing the peripheral circuits to continue operation  
(Some parts of the serial transfer function stop operation).
  - 1) Oscillation is not stopped automatically.
  - 2) Canceled by a system reset or occurrence of an interrupt
- HOLD mode : Suspends instruction execution and the operation of the peripheral circuits.
  - 1) The CF, RC, X'tal, and multifrequency RC oscillators automatically stop operation.
  - 2) There are three ways of resetting the HOLD mode.
    - (1) Setting the reset pin to the low level
    - (2) Setting at least one of the INT0, INT1, INT2, INT4, and INT5 pins to the specified level
    - (3) Having an interrupt source established at port 0
- X'tal HOLD mode : Suspends instruction execution and the operation of the peripheral circuits except the base timer and infrared remote controller circuit.
  - 1) The CF, RC, and multifrequency RC oscillators automatically stop operation.
  - 2) The state of crystal oscillation established when the X'tal HOLD mode is entered is retained.
  - 3) There are five ways of resetting the X'tal HOLD mode.
    - (1) Setting the reset pin to the low level
    - (2) Setting at least one of the INT0, INT1, INT2, INT4, and INT5 pins to the specified level
    - (3) Having an interrupt source established at port 0
    - (4) Having an interrupt source established in the base timer circuit
    - (5) Having an interrupt source established in the infrared remote control receiver circuit

## ■ On-chip Debugger Function

- Supports software debugging with the IC mounted on the target board.

## ■ Package Form

- QIP100E(14×20) : Pb-Free / Halogen Free type
- TQFP100(14×14) : Pb-Free / Halogen Free type [Under Development]

## ■ Development Tools

- On-chip Debugger : TCB87 TypeB +LC87F7Nxx A or TCB87 TypeC (3Lines Cable) +LC87F7NxxA

## ■ Flash ROM Programming boards

Package	Programming Boards
QIP100E(14×20)	W87FQ100
TQFP100(14×14)	W87FSQ100

## ■ Flash ROM Programmer

Maker		Model	Supported Version	Device
Flash Support Group, Inc (FSG)	Single Programmer	AF9709C	(Note 2)	LC87F7NP6A LC87F7NJ2A LC87F7NC8A
	Gang Programmer	AF9723/AF9723B(main unit) (including models manufactured by Ando Electric Co., Ltd.)	(Note 2)	LC87F7NP6A LC87F7NJ2A LC87F7NC8A
	Gang Programmer	AF9833(unit) (including models manufactured by Ando Electric Co., Ltd.)	(Note 2)	LC87F7NP6A LC87F7NJ2A LC87F7NC8A
Flash Support Group, Inc (FSG) +Our company (Note 1)	In-circuit Single/Gang Programmer	AF9101/AF9103(main unit) (manufactured by FSG)	(Note 2)	LC87F7NP6A LC87F7NJ2A LC87F7NC8A
	In-circuit Single/Gang Programmer	SIB87 Type C (Interface Driver) (Our company model)		LC87F7NP6A LC87F7NJ2A LC87F7NC8A
Our company	Single/Gang Programmer	SKK Type B / Type C (SanyoFWS)	Application Version 1.08 or later	LC87F7NP6A
	In-circuit Single/Gang Programmer	SKK-DBG Type B /Type C (SanyoFWS)	Chip Data Version 2.44 later	LC87F7NJ2A LC87F7NC8A

Contact information about the AF series :

Flash Support Group Company (TOA ELECTRONICS, Inc.)

Phone : 81-53-428-8380

E-mail : sales@j-fsg.co.jp

Note1 : On-board-programmer from FSG (AF9101/AF9103) and serial interface driver from our company (SIB87) together can give a PC-less, standalone on-board-programming capabilities.

Note2 : It needs a special programming devices and applications depending on the use of programming environment.  
Please ask FSG or our company for the information.


**Package Dimensions**

unit : mm

**PQFP100 14x20 / QIP100E**

CASE 122BV

ISSUE A

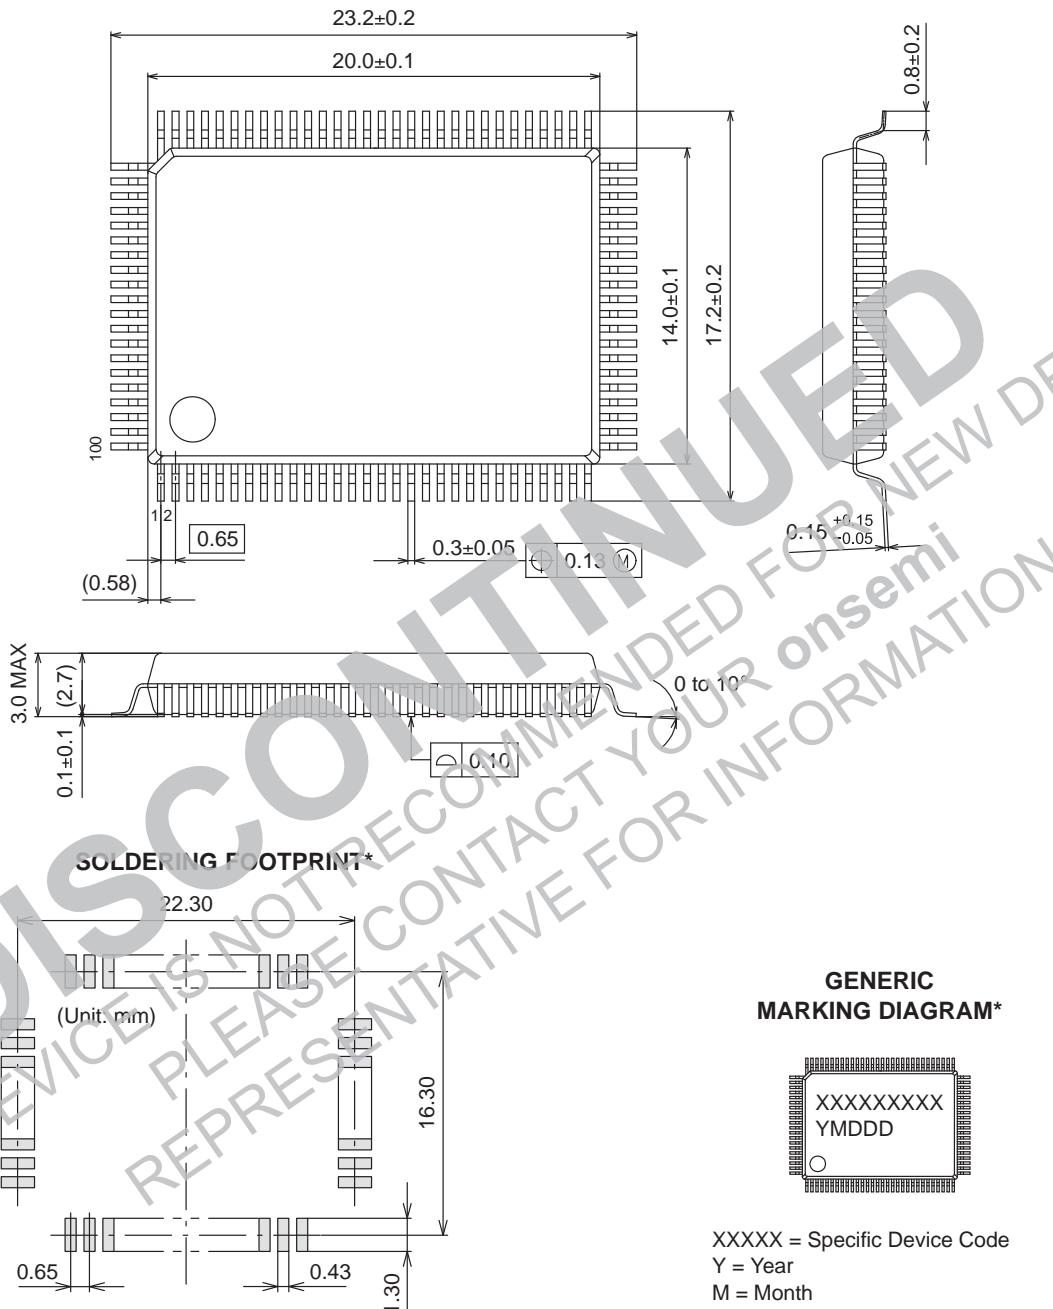

NOTE: The measurements are not to guarantee but for reference only.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

\*This information is generic. Please refer to device data sheet for actual part marking.  
Pb-Free indicator, "G" or microdot "■", may or may not be present.


## Package Dimensions

unit : mm

\*Package TQFP100(14x14) type is Under Development.

### TQFP100 14x14 / TQFP100

CASE 932AY  
ISSUE A

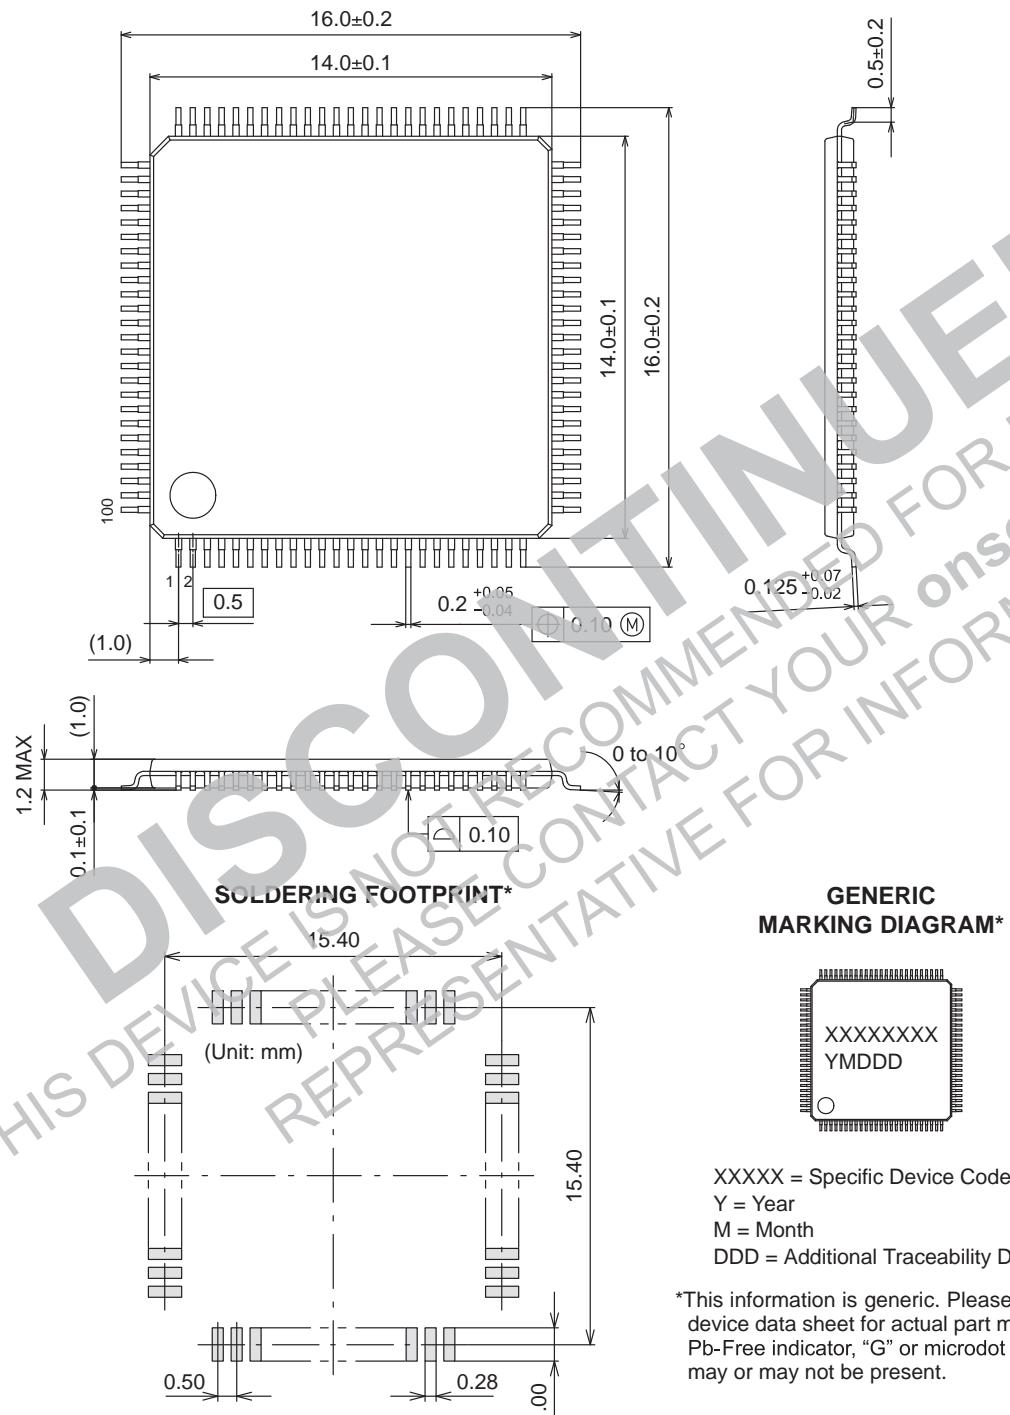

NOTE: The measurements are not to guarantee but for reference only.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.


**Pin Assignment**

QIP100E(14x20), Pb-Free/Halogen Free type

		V3/PL6/AN14/DBGP2	80	S20/PC4
		V4/PL7/INT7	79	S19/PC3
		S46/PF7/INT7	78	S18/PC2
		S45/PF6/INT6	77	S17/PC1
		S44/PF4	76	S16/PC0
		S43/PF3	75	S15/PB7
		S42/PF2	74	S14/PB6
		S41/PF1	73	S13/PB5
		S40/PF0	72	S12/PB4
		S39/PE7	71	S11/PB3
		S38/PE6	70	S10/PB2
		S37/PE5	69	S9/PB1
		S36/PE4	68	S8/PB0
		S35/PE3	67	S7/PA7
		S34/PE2	66	S6/PA6
		S33/PE1	65	S5/PA5
		S32/PE0	64	S4/PA4
		S31/PD7	63	S3/PA3
		S30/PD6	62	S2/PA2
		S29/PD5	61	S1/PA1
		S28/PD4	60	
		S27/PD3	59	
		S26/PD2	58	
		S25/PD1	57	
		S24/PD0	56	
		VSS2	55	
		S23/PC7	53	
		S22/PC6	52	
		S21/PC5	51	
P30/INT4/T1IN/INT6/T0LCP1/PWM4/S48	81	V2/PL5/AN13/DBGP1	81	
P31/INT4/T1IN/PWM5/S49	82	V1/PL4/AN12/DBGP0	82	
COM0/PL0	83	COM1/PL1	84	
COM2/PL2	85	COM3/PL3	86	
VSS3	88	VDD3	90	
P32/INT4/T1IN/UTX1/S50	91	P33/INT4/T1IN/URX1/S51	92	
P34/INT5/T1IN/INT7/T0HCP1/UTX2/S52	93	P35/INT5/T1IN/URX2/S53	94	
P00/DGBP0	95	P01/DGBP1	96	
P02 /DGBP2	97	P03/INT6	98	
P04/INT7	99	P05/CKO	100	
P16/T1PWML/BUZ	10	P17/T1PWMH/BUZ	11	
VDD1	11	RFS	12	
XT14AN10	12	XT14AN11	13	
VSS1	14	C/F1	15	
CF2	16	VDD1	17	
P80/AN0	18	P81/AN1	19	
P82/AN2	20	P83/AN3	21	
P84/AN4	22	P85/AN5	23	
P86/AN6	24	P87/AN7/MICIN	25	
P70/INT0/T0LCP/AN8	26	P71/INT1/T0HCP/AN9	27	
P72/INT2/T0IN/NKIN	28	P73/INT3/T0IN/RMIN	29	
S0/PA0	30			


**DISCONTINUED**  
 THIS DEVICE IS NOT  
 PLEASE CONTACT YOUR onsemi  
 REPRESENTATIVE FOR NEW INFORMATION

TQFIP100(14x14), Pb-Free/Halogen Free type [Under Development]

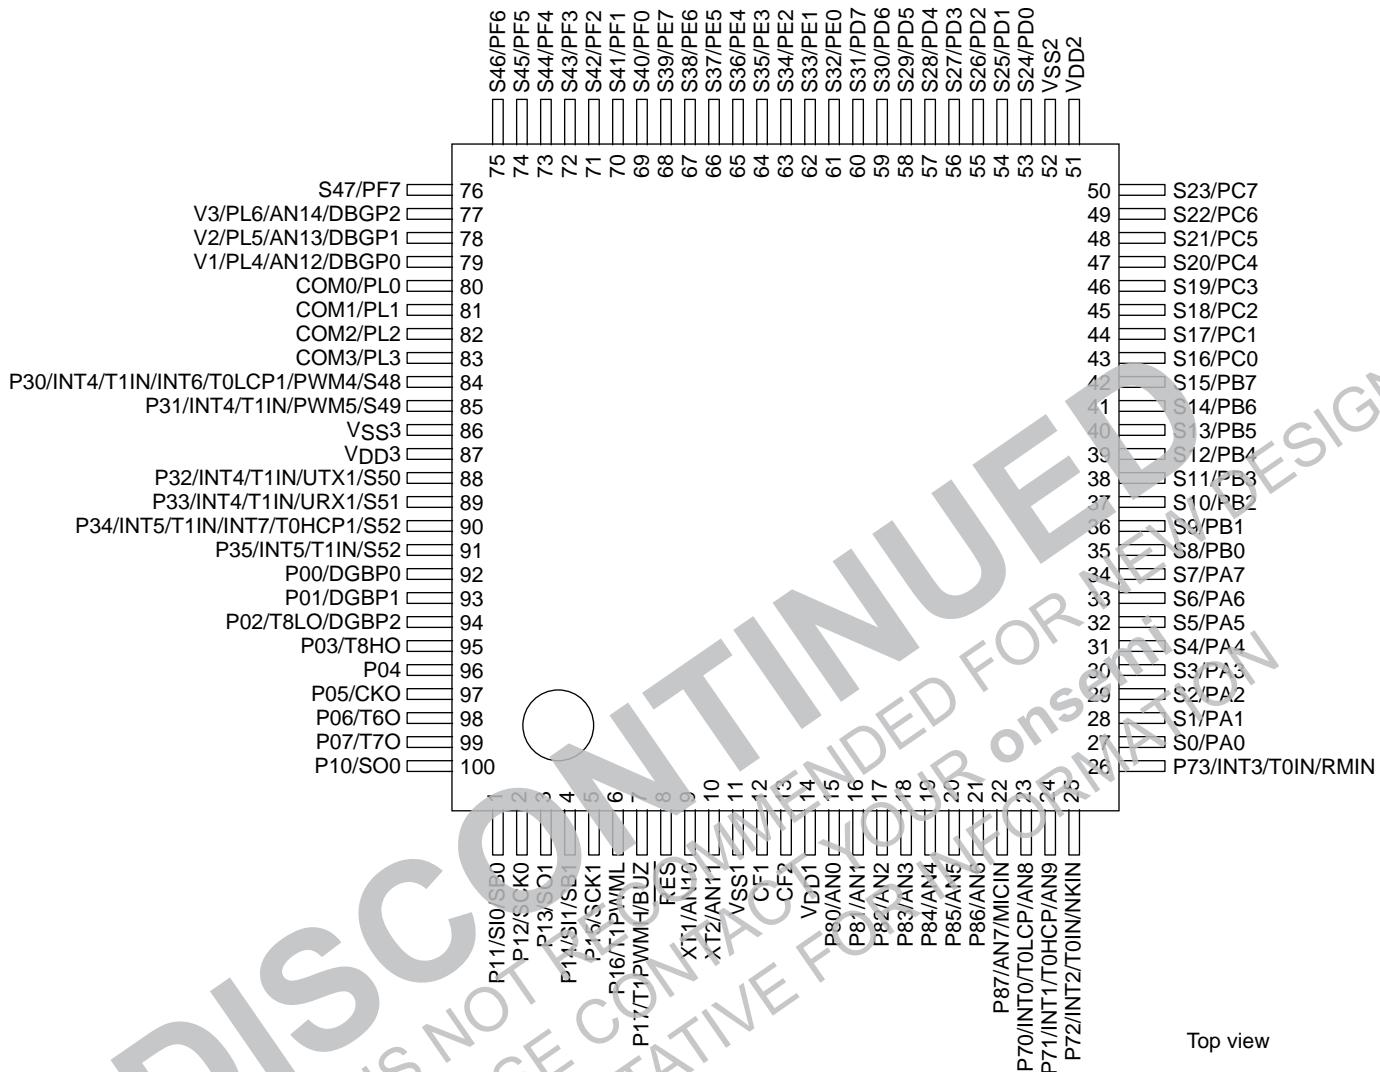

Top view

## System Block Diagram

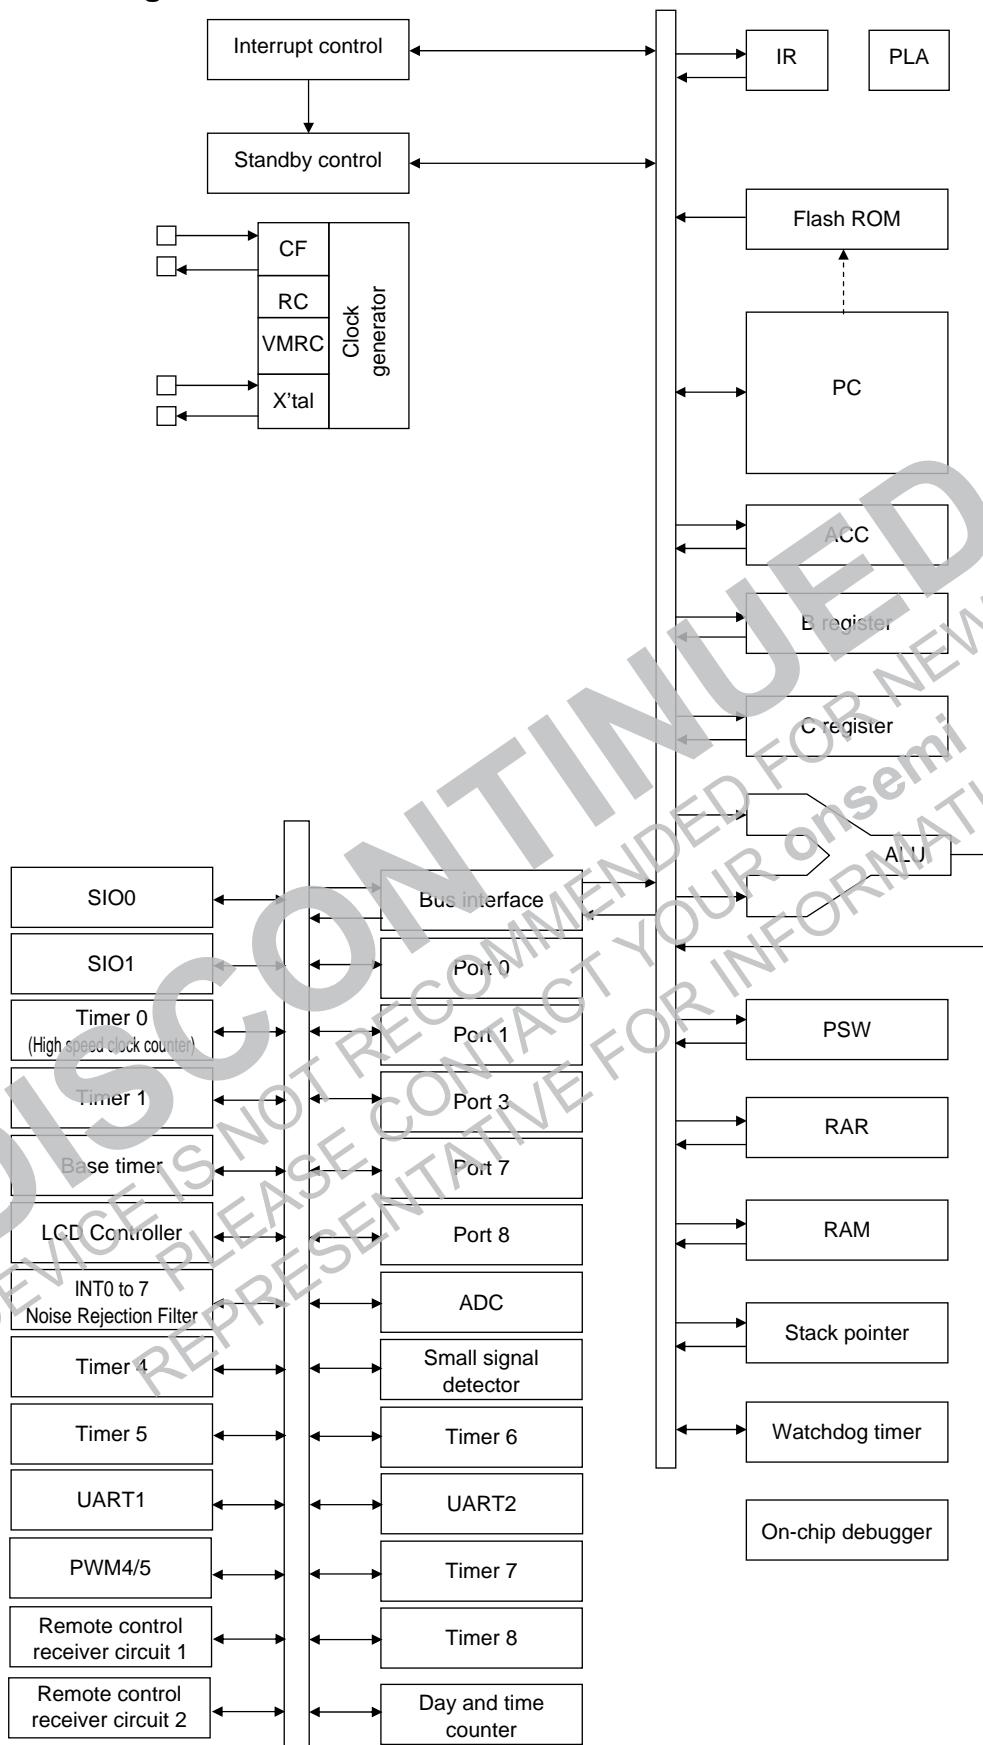

# LC87F7NJ2A

## Pin Description

Pin Name	I/O	Description	Option																														
V <sub>SS</sub> 1 V <sub>SS</sub> 2 V <sub>SS</sub> 3	-	- power supply pin	No																														
V <sub>DD</sub> 1 V <sub>DD</sub> 2 V <sub>DD</sub> 3	-	+ power supply pin	No																														
Port 0	I/O	<ul style="list-style-type: none"> <li>• 8-bit I/O port</li> <li>• I/O specifiable in 1-bit units</li> <li>• Pull-up resistors can be turned on and off in 1-bit units.</li> <li>• Input for HOLD release</li> <li>• Input for port 0 interrupt</li> <li>• Shared pins</li> <li>P03: INT6 input</li> <li>P04: INT7 input</li> <li>P05: Clock output (system clock/can selected from sub clock)</li> <li>P06: Timer 6 toggle output</li> <li>P07: Timer 7 toggle output</li> <li>On chip debugger pins: DBGP0 to DBGP2(P00 to P02)</li> </ul>	Yes																														
Port 1	I/O	<ul style="list-style-type: none"> <li>• 8-bit I/O port</li> <li>• I/O specifiable in 1-bit units</li> <li>• Pull-up resistors can be turned on and off in 1-bit units.</li> <li>• Shared pins</li> <li>P10: SIO0 data output</li> <li>P11: SIO0 data input/bus I/O</li> <li>P12: SIO0 clock I/O</li> <li>P13: SIO1 data output</li> <li>P14: SIO1 data input/bus I/O</li> <li>P15: SIO1 clock I/O</li> <li>P16: Timer 1 PWM1 output</li> <li>P17: Timer 1 PWMH output/beeper output</li> </ul>	Yes																														
Port 3	I/O	<ul style="list-style-type: none"> <li>• 6-bit I/O port</li> <li>• Segment output for LCD</li> <li>• I/O specifiable in 1-bit units</li> <li>• Pull-up resistors can be turned on and off in 1-bit units</li> <li>• Shared pins</li> <li>P30 to P33: INT4 input/HOLD release input/timer 1 event input/timer 0L capture input/timer 0H capture input</li> <li>P34 to P35: INT5 input/HOLD release input/timer 1 event input/timer 0L capture input/timer 0H capture input</li> <li>P30: PWM4 output/INT6 input/timer 0L capture 1 input</li> <li>P31: PWM5 output</li> <li>P32: UART1 transmit</li> <li>P33: UART1 receive</li> <li>P34: UART2 transmit/INT7 input/timer 0H capture 1 input</li> <li>P35: UART2 receive</li> </ul> <p>Interrupt acknowledge type</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th></th> <th>Rising</th> <th>Falling</th> <th>Rising &amp; Falling</th> <th>H level</th> <th>L level</th> </tr> </thead> <tbody> <tr> <td>INT4</td> <td>enable</td> <td>enable</td> <td>enable</td> <td>disable</td> <td>disable</td> </tr> <tr> <td>INT5</td> <td>enable</td> <td>enable</td> <td>enable</td> <td>disable</td> <td>disable</td> </tr> <tr> <td>INT6</td> <td>enable</td> <td>enable</td> <td>enable</td> <td>disable</td> <td>disable</td> </tr> <tr> <td>INT7</td> <td>enable</td> <td>enable</td> <td>enable</td> <td>disable</td> <td>disable</td> </tr> </tbody> </table>		Rising	Falling	Rising & Falling	H level	L level	INT4	enable	enable	enable	disable	disable	INT5	enable	enable	enable	disable	disable	INT6	enable	enable	enable	disable	disable	INT7	enable	enable	enable	disable	disable	Yes
	Rising	Falling	Rising & Falling	H level	L level																												
INT4	enable	enable	enable	disable	disable																												
INT5	enable	enable	enable	disable	disable																												
INT6	enable	enable	enable	disable	disable																												
INT7	enable	enable	enable	disable	disable																												
P30 to P35																																	

Continued on next page.

# LC87F7NJ2A

Continued from preceding page.

Pin Name	I/O	Description	Option																														
Port 7	I/O	<ul style="list-style-type: none"> <li>• 4-bit I/O port</li> <li>• I/O specifiable in 1-bit units</li> <li>• Pull-up resistors can be turned on and off in 1-bit units.</li> <li>• Shared pins</li> </ul> <p>P70: INT0 input/HOLD release input/timer 0L capture input/watchdog timer output            P71: INT1 input/HOLD release input/timer 0H capture input            P72: INT2 input/HOLD release input/timer 0 event input/timer 0L capture input/                  high speed clock counter input            P73: INT3 input (with noise filter)/timer 0 event input/timer 0H capture input/                  remote control receiver input            AD converter input ports: AN8 (P70), AN9 (P71)</p> <p>Interrupt acknowledge type</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th></th><th>Rising</th><th>Falling</th><th>Rising &amp; Falling</th><th>H level</th><th>L level</th></tr> </thead> <tbody> <tr> <td>INT0</td><td>enable</td><td>enable</td><td>disable</td><td>enable</td><td>enable</td></tr> <tr> <td>INT1</td><td>enable</td><td>enable</td><td>disable</td><td>enable</td><td>enable</td></tr> <tr> <td>INT2</td><td>enable</td><td>enable</td><td>enable</td><td>disable</td><td>disable</td></tr> <tr> <td>INT3</td><td>enable</td><td>enable</td><td>enable</td><td>disable</td><td>enable</td></tr> </tbody> </table>		Rising	Falling	Rising & Falling	H level	L level	INT0	enable	enable	disable	enable	enable	INT1	enable	enable	disable	enable	enable	INT2	enable	enable	enable	disable	disable	INT3	enable	enable	enable	disable	enable	No
	Rising	Falling	Rising & Falling	H level	L level																												
INT0	enable	enable	disable	enable	enable																												
INT1	enable	enable	disable	enable	enable																												
INT2	enable	enable	enable	disable	disable																												
INT3	enable	enable	enable	disable	enable																												
P70 to P73																																	
Port 8	I/O	<ul style="list-style-type: none"> <li>• 8-bit I/O port</li> <li>• I/O specifiable in 1-bit units</li> <li>• Shared pins</li> </ul> <p>AD converter input ports: AN0 to AN7            Small signal detector input port: MICIN (P87)</p>	No																														
P80 to P87																																	
S0/PA0 to S7/PAT7	I/O	<ul style="list-style-type: none"> <li>• Segment output for LCD</li> <li>• Can be used as general-purpose I/O port (PA)</li> </ul>	No																														
S8/PB0 to S15/PB7	I/O	<ul style="list-style-type: none"> <li>• Segment output for LCD</li> <li>• Can be used as general-purpose I/O port (PB)</li> </ul>	No																														
S16/PC0 to S23/PC7	I/O	<ul style="list-style-type: none"> <li>• Segment output for LCD</li> <li>• Can be used as general-purpose I/O port (PC)</li> </ul>	No																														
S24/PD0 to S31/PD7	I/O	<ul style="list-style-type: none"> <li>• Segment output for LCD</li> <li>• Can be used as general-purpose I/O port (PD)</li> </ul>	No																														
S32/PE0 to S39/PE7	I/O	<ul style="list-style-type: none"> <li>• Segment output for LCD</li> <li>• Can be used as general-purpose I/O port (PE)</li> </ul>	No																														
S40/PF0 to S47/PF7	I/O	<ul style="list-style-type: none"> <li>• Segment output for LCD</li> <li>• Can be used as general-purpose I/O port (PF)</li> </ul> <p>PF6: INT6 input            PF7: INT7 input</p>	No																														
COM0/PL0 to COM3/PL3	I/O	<ul style="list-style-type: none"> <li>• Common output for LCD</li> <li>• Can be used as general-purpose input port (PL)</li> </ul>	No																														
V1/PL4 to V3/PL6	I/O	<ul style="list-style-type: none"> <li>• LCD output bias power supply</li> <li>• Can be used as general-purpose input port (PL)</li> <li>• Shared pins</li> </ul> <p>AD converter input ports: AN12 (V1) to AN14 (V3)            On-chip debugger pins: DBGP0 (V1) to DBGP2 (V3)</p>	No																														
RES	Input	Reset pin	No																														
XT1	Input	<ul style="list-style-type: none"> <li>• 32.768kHz crystal oscillator input pin</li> <li>• Shared pins</li> </ul> <p>General-purpose input port            Must be connected to <math>V_{DD1}</math> if not to be used.            AD converter input port: AN10</p>	No																														
XT2	I/O	<ul style="list-style-type: none"> <li>• 32.768kHz crystal oscillator output pin</li> <li>• Shared pins</li> </ul> <p>General-purpose I/O port            Must be set for oscillation and kept open if not to be used.            AD converter input port: AN11</p>	No																														
CF1	Input	Ceramic resonator input pin	No																														
CF2	Output	Ceramic resonator output pin	No																														

## Port Output Types

The table below lists the types of port outputs and the presence/absence of a pull-up resistor.  
Data can be read into any input port even if it is in the output mode


Port Name	Option Selected in Units of	Option Type	Output Type	Pull-up Resistor
P00 to P07	each bit	1	CMOS	Programmable (Note)
		2	Nch-open drain	Programmable
P10 to P17	each bit	1	CMOS	Programmable
		2	Nch-open drain	Programmable
P30 to P35	each bit	1	CMOS	Programmable
		2	Nch-open drain	Programmable
P70	-	No	Nch-open drain	Programmable
P71 to P73	-	No	CMOS	Programmable
P80 to P87	-	No	Nch-open drain	No
S0/PA0 to S47/PF7	-	No	CMOS	Programmable
COM0/PL0 to COM3/PL3	-	No	Input only	No
V1/PL4 to V3/PL6	-	No	Input only	No
XT1	-	No	Input only	No
XT2	-	No	Output for 32.768kHz crystal oscillator (Nch-open drain when in general-purpose output mode)	No

## User Option List

Option Name	Option Type	Mask Version *1	Flash Version	Option Selected in Units of	Specified Item
Port output form	P00 to P07	O	O	each bit	CMOS
	P10 to P17	C	O		Nch-open drain
	P30 to P35	O	O	each bit	CMOS
Program start address	-	x	O	-	0000H
		*2			1FF00H

\*1: Mask option selection - No change possible after the mask is completed.

\*2: Program start address of the mask version is 0000H.

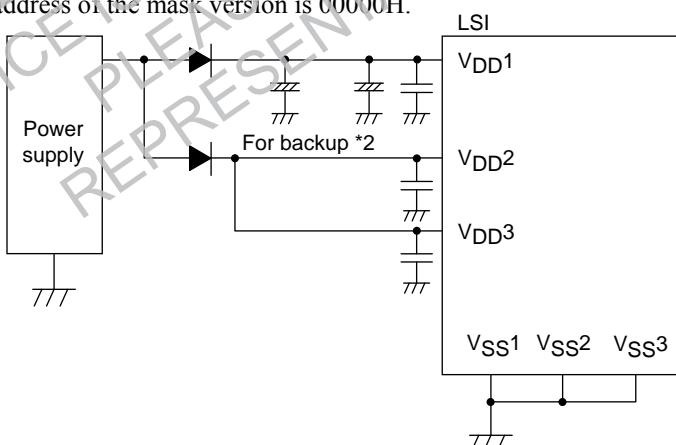

\*1: Connect the IC as shown below to minimize the noise input to the VDD1 pin.  
Be sure to electrically short the VSS1, VSS2, and VSS3 pins.

\*2: The internal memory is sustained by VDD1. If none of VDD2 and VDD3 are backed up, the high level output at the ports are unstable in the HOLD backup mode, allowing through current to flow into the input buffer and thus shortening the backup time.

Make sure that the port outputs are held at the low level in the HOLD backup mode.

# LC87F7NJ2A

## Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$ , $V_{SS1} = V_{SS2} = V_{SS3} = 0\text{V}$

Parameter	Symbol	Pin/Remarks	Conditions	Specification			
				$V_{DD}$ [V]	min	typ	max
Maximum supply voltage	$V_{DD}$ max	$V_{DD1}, V_{DD2}, V_{DD3}$	$V_{DD1}=V_{DD2}=V_{DD3}$		-0.3		+4.6
supply voltage for LCD	VLCD	V1/PL4, V2/PL5, V3/PL6	$V_{DD1}=V_{DD2}=V_{DD3}$		-0.3		$V_{DD}$
Input voltage	$V_I(1)$	Port L XT1, CF1, $\overline{\text{RES}}$			-0.3		$V_{DD}+0.3$
	$V_I(2)$	$V_{DD2}, V_{DD3}$			$V_{SS}$		$V_{DD}+0.1$
Input/output voltage	$V_{IO}(1)$	Ports 0, 1, 3, 7, 8 Ports A, B, C, D, E, F, XT2			-0.3		$V_{DD}+0.3$
High level output current	Peak output current	IOPH(1)	Ports 0, 1, 32 to 35	• CMOS output selected • Current at each pin		-10	
	IOPH(2)	Ports 30, 31	• CMOS output selected • Current at each pin		-20		
	IOPH(3)	Ports 71 to 73	Current at each pin		-5		
	IOPH(4)	Ports A, B, C, D, E, F	Current at each pin		-5		
	Mean output current (Note 1-1)	IOMH(1)	Ports 0, 1, 32 to 35	• CMOS output selected • Current at each pin		-7.5	
	IOMH(2)	Ports 30, 31	• CMOS output selected • Current at each pin		-15		
	IOMH(3)	Ports 71 to 73	Current at each pin		-3		
	IOMH(4)	Ports A, B, C, D, E, F	Current at each pin		3		
	Total output current	$\Sigma I_{OAH}(1)$	Ports 0, 1, 32 to 35	Total of all pins	-25		
	$\Sigma I_{OAH}(2)$	Ports 30, 31	Total of all pins	-25			
	$\Sigma I_{OAH}(3)$	Ports 0, 1, 3	Total of all pins	-45			
	$\Sigma I_{OAH}(4)$	Ports 71 to 73	Total of all pins	-5			
	$\Sigma I_{OAH}(5)$	Ports A, B, C	Total of all pins	-25			
	$\Sigma I_{OAH}(6)$	Ports D, E, F	Total of all pins	-25			
	$\Sigma I_{OAH}(7)$	Ports A, B, C, D, E, F	Total of all pins	-45			
Low level output current	Peak output current	IOPL(1)	Ports 0, 1, 32 to 35	Current at each pin			20
	IOPL(2)	Ports 30, 31	Current at each pin				30
	IOPL(3)	Ports 7, 8 XT2	Current at each pin				10
	IOPL(4)	Ports A, B, C, D, E, F	Current at each pin				10
	Mean output current (Note 1-1)	IOML(1)	Ports 0, 1, 32 to 35	Current at each pin			15
	IOML(2)	Ports 30, 31	Current at each pin				20
	IOML(3)	Ports 7, 8 XT2	Current at each pin				7.5
	IOML(4)	Ports A, B, C, D, E, F	Current at each pin				7.5
	Total output current	$\Sigma I_{OAL}(1)$	Ports 0, 1, 32 to 35	Total of all pins			45
	$\Sigma I_{OAL}(2)$	Ports 30, 31	Total of all pins				45
	$\Sigma I_{OAL}(3)$	Ports 0, 1, 3	Total of all pins				80
	$\Sigma I_{OAL}(4)$	Ports 7, 8 XT2	Total of all pins				20
	$\Sigma I_{OAL}(5)$	Ports A, B, C	Total of all pins				45
	$\Sigma I_{OAL}(6)$	Ports D, E, F	Total of all pins				45
	$\Sigma I_{OAL}(7)$	Ports A, B, C, D, E, F	Total of all pins				80
Maximum power dissipation	Pd max	QIP100E(14x20)	$T_a = -40 \text{ to } +85^\circ\text{C}$			215	mW
		TQFP100(14x14)	$T_a = -40 \text{ to } +85^\circ\text{C}$			under	
Operating ambient temperature	Topr				-40		+85
Storage ambient temperature	Tstg				-55		+125

Note 1-1: The mean output current is a mean value measured over 100ms.

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

# LC87F7NJ2A

## Allowable Operating Range at $T_a = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ , $V_{SS1} = V_{SS2} = V_{SS3} = 0\text{V}$

Parameter	Symbol	Pin/Remarks	Conditions	Specification			
				$V_{DD}$ [V]	min	typ	max
Operating supply voltage (Note 2-1)	$V_{DD(1)}$	$V_{DD1}=V_{DD2}=V_{DD3}$	0.167 $\mu\text{s}$ $\leq t_{CYC} \leq 200\mu\text{s}$		2.7		3.6
			0.356 $\mu\text{s}$ $\leq t_{CYC} \leq 200\mu\text{s}$		2.5		3.6
Memory sustaining supply voltage	$V_{HD}$	$V_{DD1}$	RAM and register contents sustained in HOLD mode.		2.0		3.6
High level input voltage	$V_{IH(1)}$	Ports 0, 3, 8 Ports A, B, C, D, E, F Port L	Output disabled	2.5 to 3.6	0.3 $V_{DD}$ +0.7		$V_{DD}$
	$V_{IH(2)}$	Port 1 Ports 71 to 73 P70 port input/interrupt side	• Output disabled • When INT1VTSL=0 (P71 only)	2.5 to 3.6	0.3 $V_{DD}$ +0.7		$V_{DD}$
	$V_{IH(3)}$	P71 interrupt side	• Output disabled • When INT1VTSL=1	2.5 to 3.6	0.85 $V_{DD}$		$V_{DD}$
	$V_{IH(4)}$	P87 small signal input side	Output disabled	2.5 to 3.6	0.75 $V_{DD}$		$V_{DD}$
	$V_{IH(5)}$	P70 watchdog timer side	Output disabled	2.5 to 3.6	0.9 $V_{DD}$		$V_{DD}$
	$V_{IH(6)}$	XT1, XT2, CF1, $\overline{RES}$		2.5 to 3.6	0.75 $V_{DD}$		$V_{DD}$
Low level input voltage	$V_{IL(1)}$	Ports 0, 3, 8 Ports A, B, C, D, E, F Port L	Output disabled	2.5 to 3.6	$V_{SS}$		0.2 $V_{DD}$
	$V_{IL(2)}$	Port 1 Ports 71 to 73 P70 port input/interrupt side	• Output disabled • When INT1VTSL=0 (P71 only)	2.5 to 3.6	$V_{SS}$		0.2 $V_{DD}$
	$V_{IL(3)}$	P71 interrupt side	• Output disabled • When INT1VTSL=1	2.5 to 3.6	$V_{SS}$		0.45 $V_{DD}$
	$V_{IL(4)}$	P87 small signal input side	Output disabled	2.5 to 3.6	$V_{SS}$		0.25 $V_{DD}$
	$V_{IL(5)}$	P70 watchdog timer side	Output disabled	2.5 to 3.6	$V_{SS}$		0.8 $V_{DD}$ -1.0
	$V_{IL(6)}$	XT1, XT2, CF1, $\overline{RES}$		2.5 to 3.6	$V_{SS}$		0.25 $V_{DD}$
Instruction cycle time (Note 2-2)	$t_{CYC}$			2.7 to 3.6	0.167		200
				2.5 to 3.6	0.356		200
External system clock frequency	$F_{EXCF(1)}$	CF1	• CF2 pin open • System clock frequency division ratio=1/1 • External system clock duty=50±5%	2.5 to 3.6	0.1		18
			• CF2 pin open • System clock frequency division ratio=1/2	2.5 to 3.6	0.2		36

Note 2-1:  $V_{DD}$  must be held greater than or equal to 3.0V in the flash ROM onboard programming mode.

Note 2-2: Relationship between  $t_{CYC}$  and oscillation frequency is  $3/F_{mCF}$  at a division ratio of 1/1 and  $6/F_{mCF}$  at a division ratio of 1/2.

Continued on next page.

# LC87F7NJ2A

Continued from preceding page.

Parameter	Symbol	Pin/Remarks	Conditions	$V_{DD}$ [V]	Specification			
					min	typ	max	unit
Oscillation frequency range (Note 2-3)	FmCF(1)	CF1, CF2	• 18MHz ceramic oscillation • See Fig. 1.	2.7 to 3.6		18		MHz
	FmCF(2)	CF1, CF2	• 8MHz ceramic oscillation • See Fig. 1.	2.5 to 3.6		8		
	FmRC		Internal RC oscillation	2.5 to 3.6	0.3	1.0	2.0	
	FmVMRC(1)		• Frequency variable RC source oscillation • When VMRAJ2 to 0=4, VMFAJ2 to 0=0, VMSL4M=0	2.5 to 3.6		10		
	FmVMRC(2)		• Frequency variable RC source oscillation • When VMRAJ2 to 0=4, VMFAJ2 to 0=0, VMSL4M=1	2.5 to 3.6		4		
	FsX'tal	XT1, XT2	• 32.768kHz crystal oscillation • See Fig. 2.	2.5 to 3.6		32.768		KHz
Frequency variable RC oscillation usable range	OpVMRC(1)		When VMSL4M=0	2.5 to 3.6	8	10	12	MHz
	OpVMRC(2)		When VMSL4M=1	2.5 to 3.6	3.5	4	4.5	
Frequency variable RC oscillation adjustment range	VmADJ(1)		Each step of VMRAJn (Wide range)	2.5 to 3.6	8	24	64	%
	VmADJ(2)		Each step of VMFAJn (Small range)	2.5 to 3.6		4	8	

Note 2-3: See Tables 1 and 2 for the oscillation constants.

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

## Electrical Characteristics at $T_a = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ , $V_{SS1} = V_{SS2} = V_{SS3} = 0\text{V}$

Parameter	Symbol	Pin/Remarks	Conditions	$V_{DD}$ [V]	Specification			
					min	typ	max	unit
High level input current	$I_{IH}(1)$	Ports 0, 1, 3, 7, 8 Ports A, B, C, D, E, F Port L	• Output disabled • Pull-up resistor off • $V_{IN}=V_{DD}$ (Including output Tr's off leakage current)	2.5 to 3.6				1
	$I_{IH}(2)$	$\overline{RES}$	$V_{IN}=V_{DD}$	2.5 to 3.6				1
	$I_{IH}(3)$	XT1, XT2	• For input port specification • $V_{IN}=V_{DD}$	2.5 to 3.6				1
	$I_{IH}(4)$	CF1	$V_{IN}=V_{DD}$	2.5 to 3.6				15
	$I_{IH}(5)$	P87 small signal input side	$V_{IN}=VBIS+0.5\text{V}$ (VBIS: Bias voltage)	2.5 to 3.6	1.5	5.5	10	
Low level input current	$I_{IL}(1)$	Ports 0, 1, 3, 7, 8 Ports A, B, C, D, E, F Port L	• Output disabled • Pull-up resistor off • $V_{IN}=V_{SS}$ (Including output Tr's off leakage current)	2.5 to 3.6	-1			$\mu\text{A}$
	$I_{IL}(2)$	$\overline{RES}$	$V_{IN}=V_{SS}$	2.5 to 3.6	-1			
	$I_{IL}(3)$	XT1, XT2	• For input port specification • $V_{IN}=V_{SS}$	2.5 to 3.6	-1			
	$I_{IL}(4)$	CF1	$V_{IN}=V_{SS}$	2.5 to 3.6	-15			
	$I_{IL}(5)$	P87 small signal input side	$V_{IN}=VBIS-0.5\text{V}$ (VBIS: Bias voltage)	2.5 to 3.6	-10	-5.5	-1.5	

Continued on next page.

# LC87F7NJ2A

Continued from preceding page.

Parameter	Symbol	Pin/Remarks	Conditions	Specification			
				V <sub>DD</sub> [V]	min	typ	max
High level output voltage	V <sub>OH(1)</sub>	Ports 0, 1, 32 to 35	I <sub>OH</sub> =-0.4mA	2.5 to 3.6	V <sub>DD</sub> -0.4		
	V <sub>OH(2)</sub>	Ports 30, 31	I <sub>OH</sub> =-1.6mA	2.5 to 3.6	V <sub>DD</sub> -0.4		
	V <sub>OH(3)</sub>	Ports 71 to 73	I <sub>OH</sub> =-0.4mA	2.5 to 3.6	V <sub>DD</sub> -0.4		
	V <sub>OH(4)</sub>	Ports A, B, C Ports D, E, F	I <sub>OH</sub> =-0.4mA	2.5 to 3.6	V <sub>DD</sub> -0.4		
Low level output voltage	V <sub>OL(1)</sub>	Ports 0, 1, 32 to 35 Ports 30, 31 (PWM function output mode)	I <sub>OL</sub> =1.6mA	2.5 to 3.6			0.4
	V <sub>OL(2)</sub>	Ports 30, 31 (Port function output mode)	I <sub>OL</sub> =5mA	2.5 to 3.6			0.4
	V <sub>OL(3)</sub>	Ports 7, 8 XT2	I <sub>OL</sub> =1.6mA	2.5 to 3.6			0.4
	V <sub>OL(4)</sub>	Ports A, B, C Ports D, E, F	I <sub>OL</sub> =1.6mA	2.5 to 3.6			0.4
LCD output voltage regulation	VODLS	S0 to S53	• I <sub>O</sub> =0mA • VLCD, 2/3VLCD, 1/3VLCD level output • See Fig. 8.	2.5 to 3.6	0		±0.2
	VODLC	COM0 to COM3	• I <sub>O</sub> =0mA • VLCD, 2/3VLCD, 1/2VLCD, 1/3VLCD level output • See Fig. 8.	2.5 to 3.6	0		±0.2
LCD bias resistor	RLCD(1)	Resistance per one bias resistor	See Fig. 8.	2.5 to 3.6		60	
	RLCD(2)	Resistance per one bias resistor 1/2R mode	See Fig. 8.	2.5 to 3.6		30	
Resistance of pull-up MOS Tr.	Rpu(1)	Ports 0, 1, 3, 7 Ports A, B, C, D, E, F	V <sub>OH</sub> =0.9V <sub>DD</sub>	2.5 to 3.6	18	50	50
Hysteresis voltage	VHYS(1)	Ports 1, 7 RES		2.5 to 3.6		0.1V <sub>DD</sub>	
	VHYS(2)	P87 small signal input side		2.5 to 3.6		0.1V <sub>DD</sub>	
Pin capacitance	CP	All pins	• For pins other than that under test: V <sub>IN</sub> =V <sub>SS</sub> • f=1MHz • Ta=25°C	2.5 to 3.6		10	pF
Input sensitivity	Vsen	P87 small signal input side		2.5 to 3.6	0.12V <sub>DD</sub>		V <sub>pp</sub>

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

# LC87F7NJ2A

**Serial I/O Characteristics** at  $T_a = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ,  $V_{SS1} = V_{SS2} = V_{SS3} = 0\text{V}$ ,  $0.190\mu\text{s} \leq t_{CYC} \leq 200\mu\text{s}$

**SIO0 Serial I/O Characteristics (Note 4-1-1)** at  $V_{DD} = 2.7\text{ V}$  to  $3.6\text{ V}$   $0.190\mu\text{s} \leq t_{CYC} \leq 200\mu\text{s}$

Parameter		Symbol	Pin/Remarks	Conditions	$V_{DD}$ [V]	Specification			
						min	typ	max	unit
Serial clock	Input clock	Frequency	tSCK(1)	SCK0(P12)	See Fig. 6.  • Continuous data transmission/reception mode • See Fig. 6. (Note 4-1-2)	2.5 to 3.6	2		
		Low level pulse width	tSCKL(1)			1			
		High level pulse width	tSCKH(1)			1			
			tSCKHA(1)			4			
	Output clock	Frequency	tSCK(2)	SCK0(P12)	• CMOS output selected • See Fig. 6.  • Continuous data transmission/reception mode • CMOS output selected • See Fig. 6.	2.5 to 3.6	4/3		
		Low level pulse width	tSCKL(2)				1/2		
		High level pulse width	tSCKH(2)				1/2		
			tSCKHA(2)				tSCKH(2) +2tCYC	tSCKH(2) +(10/3)tCYC	tCYC
Serial input	Data setup time		tsDI(1)	SB0(P11), SI0(P11)	• Must be specified with respect to rising edge of SIOCLK. • See Fig. 6.	2.5 to 3.6	0.03		
	Data hold time		thDI(1)				0.03		
Serial output	Input clock	Output delay time	tdD0(1)	SO0(P10), SB0(P11)	• Continuous data transmission/reception mode (Note 4-1-3)  • Synchronous 8-bit mode (Note 4-1-3)  (Note 4-1-3)	2.5 to 3.6			(1/3)tCYC +0.05
			tdD0(2)						1tCYC +0.05
			tdD0(3)						(1/3)tCYC +0.05

Note 4-1-1: These specifications are theoretical values. Add margin depending on its use.

Note 4-1-2: To use serial-clock-input in continuous trans/rec mode, a time from SI0RUN being set when serial clock is "H" to the first negative edge of the serial clock must be longer than tSCKHA.

Note 4-1-3: Must be specified with respect to falling edge of SIOCLK. Must be specified as the time to the beginning of output state change in open drain output mode. See Fig. 6.

# LC87F7NJ2A

## SIO1 Serial I/O Characteristics (Note 4-2-1)

Parameter		Symbol	Pin/Remarks	Conditions	V <sub>DD</sub> [V]	Specification				
Serial clock	Input clock	Frequency	tSCK(3)	SCK1(P15)	See Fig. 6.	2.5 to 3.6	2			tCYC
		Low level pulse width	tSCKL(3)				1			
		High level pulse width	tSCKH(3)				1			
	Output clock	Frequency	tSCK(4)	SCK1(P15)	• CMOS output selected • See Fig. 6.	2.5 to 3.6	2			tSCK
		Low level pulse width	tSCKL(4)				1/2			
		High level pulse width	tSCKH(4)				1/2			
Serial input	Data setup time	tsDI(2)	SB1(P14), SI1(P14)	• Must be specified with respect to rising edge of SIOCLK. • See Fig. 6.	2.5 to 3.6	0.03			μs	
	Data hold time	thDI(2)			2.5 to 3.6	0.03				
Serial output	Output delay time	tdD0(4)	SO1(P13), SB1(P14)	• Must be specified with respect to falling edge of SIOCLK. • Must be specified as the time to the beginning of output state change in open drain output mode. • See Fig. 6.	2.5 to 3.6			(1/3)tCYC + 0.05	μs	

Note 4-2-1: These specifications are theoretical values. Add margin depending on its use.

## Pulse Input Conditions at T<sub>a</sub> = -40°C to +85°C, V<sub>SS1</sub> = V<sub>SS2</sub> = V<sub>SS3</sub> = 0V

Parameter	Symbol	Pin/Remarks	Conditions	V <sub>DD</sub> [V]	Specification				unit
High/low level pulse width	tPIH(1) tPIL(1)	INT0(P70), INT1(P71), INT2(P72), INT4(P30 to P33), INT5(P34 to P35), INT6(P30), INT7(P34)	• Interrupt source flag can be set. • Event inputs for timer 0 or 1 are enabled.		2.5 to 3.6	1			
	tPIH(2) tPIL(2)	INT3(P73) when noise filter time constant is 1/1	• Interrupt source flag can be set. • Event inputs for timer 0 are enabled.	2.5 to 3.6	2				tCYC
	tPIH(3) tPIL(3)	INT3(P73) when noise filter time constant is 1/32	• Interrupt source flag can be set. • Event inputs for timer 0 are enabled.	2.5 to 3.6	64				
	tPIH(4) tPIL(4)	INT3(P73) when noise filter time constant is 1/128	• Interrupt source flag can be set. • Event inputs for timer 0 are enabled.	2.5 to 3.6	256				
	tPIH(5) tPIL(5)	MICIN(P87)	Condition that signal is accepted to small signal detection counter.	2.5 to 3.6	1				
	tPIH(6) tPIL(6)	RMIN(P73)	Condition that signal is accepted to remote control receiver circuit.	2.5 to 3.6	4				RMCK (Note 5-1)
	tPIL(7)	RES	Resetting is enabled.	2.5 to 3.6	200				μs

Note 5-1: RMCK is an unit for the base clock (40tCYC/50tCYC/Sub-Clock) of remote control receiver circuit.

## AD Converter Characteristics at V<sub>SS1</sub> = V<sub>SS2</sub> = V<sub>SS3</sub> = 0V

### <12bits AD Converter Mode at Ta = -30 to +70°C>

Parameter	Symbol	Pin/Remarks	Conditions	Specification					
				V <sub>DD</sub> [V]	min	typ	max	unit	
Resolution	N	AN0(P80) to AN7(P87), AN8(P70), AN9(P71), AN10(XT1), AN11(XT2)	(Note 6-1)	2.5 to 3.6		12		bit	
Absolute accuracy	ET			2.5 to 3.6			±16	LSB	
Conversion time	tCAD		• See Conversion time calculation formulas. (Note 6-2)	3.0 to 3.6	64		115	μs	
				2.7 to 3.6	128		230		
				2.5 to 3.6	256		460		
Analog input voltage range	VAIN		VAIN=V <sub>DD</sub>		V <sub>SS</sub>		V <sub>DD</sub>	V	
Analog port input current	IAINH			2.5 to 3.6		1		μA	
	IAINL		VAIN=V <sub>SS</sub>	2.5 to 3.6	-1				

### <8bits AD Converter Mode at Ta = -30 to +70°C>

Parameter	Symbol	Pin/Remarks	Conditions	Specification					
				V <sub>DD</sub> [V]	min	typ	max	unit	
Resolution	N	AN0(P80) to AN7(P87), AN8(P70), AN9(P71), AN10(XT1), AN11(XT2)	(Note 6-1)	2.5 to 3.6		8		bit	
Absolute accuracy	ET			2.5 to 3.6			±1.5	LSB	
Conversion time	TCAD		• See Conversion time calculation formulas. (Note 6-2)	3.0 to 3.6	39		71	μs	
				2.7 to 3.6	79		140		
				2.5 to 3.6	157		280		
Analog input voltage range	VAIN		VAIN=V <sub>DD</sub>		V <sub>SS</sub>		V <sub>DD</sub>	V	
Analog port input current	IAINH			2.5 to 3.6		1		μA	
	IAINL		VAIN=V <sub>SS</sub>	2.5 to 3.6	-1				

### <Conversion time calculation formulas>

12bits AD Converter Mode: tCAD(Conversion time)=((52/(division ratio)) + 2) × (1/3) × tCYC

8bits AD Converter Mode: tCAD(Conversion time)=((32/(division ratio)) + 2) × (1/3) × tCYC

Note 6-1: The quantization error (±1/2LSB) must be excluded from the absolute accuracy. The absolute accuracy must be measured in the microcontroller's state in which no I/O operations occur at the pins adjacent to the analog input channel.

Note 6-2: The conversion time refers to the period from the time an instruction for starting a conversion process till the time the conversion results register(s) are loaded with a complete digital conversion value corresponding to the analog input value.

The conversion time is 2 times the normal-time conversion time when:

- The first AD conversion is performed in the 12-bit AD conversion mode after a system reset.
- The first AD conversion is performed after the AD conversion mode is switched from 8-bit to 12-bit conversion mode.

# LC87F7NJ2A

## Consumption Current Characteristics at $T_a = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ , $V_{SS1} = V_{SS2} = V_{SS3} = 0\text{V}$

Parameter	Symbol	Pin/ Remarks	Conditions	Specification				
				$V_{DD}$ [V]	min	typ	max	unit
Normal mode consumption current (Note 7-1)	IDDOP(1)	$V_{DD1} = V_{DD2} = V_{DD3}$	<ul style="list-style-type: none"> <li>FmCF=18MHz ceramic oscillation mode</li> <li>FmX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to 12MHz side</li> <li>Internal RC oscillation stopped.</li> <li>Frequency variable RC oscillation stopped.</li> <li>1/1 frequency division ratio</li> </ul>	2.7 to 3.6		6.1	15.6	mA
			<ul style="list-style-type: none"> <li>FmCF=8MHz ceramic oscillation mode</li> <li>FmX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to 12MHz side</li> <li>Internal RC oscillation stopped.</li> <li>Frequency variable RC oscillation stopped.</li> <li>1/1 frequency division ratio</li> </ul>	2.5 to 3.6		3.9	8.8	
			<ul style="list-style-type: none"> <li>FmCF=0Hz (oscillation stopped)</li> <li>FmX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to internal RC oscillation</li> <li>Frequency variable RC oscillation stopped.</li> <li>1/2 frequency division ratio</li> </ul>	2.5 to 3.6		0.4	1.7	
	IDDOP(4)		<ul style="list-style-type: none"> <li>FmCF=0Hz (oscillation stopped)</li> <li>FmX'tal=32.768kHz crystal oscillation mode</li> <li>Internal RC oscillation stopped.</li> <li>System clock set to 10MHz with frequency variable RC oscillation</li> <li>1/1 frequency division ratio</li> </ul>	2.5 to 3.6		4.3	12.0	
			<ul style="list-style-type: none"> <li>FmCF=0Hz (oscillation stopped)</li> <li>FmX'tal=32.768kHz crystal oscillation mode</li> <li>Internal RC oscillation stopped.</li> <li>System clock set to 4MHz with frequency variable RC oscillation</li> <li>1/1 frequency division ratio</li> </ul>	2.5 to 3.6		2.1	6.6	
	IDDOP(6)		<ul style="list-style-type: none"> <li>FmCF=0Hz (oscillation stopped)</li> <li>FmX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to 32.768kHz side</li> <li>Internal RC oscillation stopped.</li> <li>Frequency variable RC oscillation stopped.</li> <li>1/2 frequency division ratio</li> </ul>	2.5 to 3.6		19.3	73	$\mu\text{A}$

Note 7-1: The consumption current value includes none of the currents that flow into the output Tr and internal pull-up resistors.

Continued on next page.

# LC87F7NJ2A

Continued from preceding page.

Parameter	Symbol	Pin/ Remarks	Conditions	Specification			
				V <sub>DD</sub> [V]	min	typ	max
HALT mode consumption current (Note 7-1)	IDDHALT(1)	V <sub>DD1</sub> =V <sub>DD2</sub> =V <sub>DD3</sub>	<ul style="list-style-type: none"> <li>• HALT mode</li> <li>• FmCF=18MHz ceramic oscillation mode</li> <li>• FmX'tal=32.768kHz crystal oscillation mode</li> <li>• System clock set to 12MHz side</li> <li>• Internal RC oscillation stopped.</li> <li>• Frequency variable RC oscillation stopped.</li> <li>• 1/1 frequency division ratio</li> </ul>	2.7 to 3.6		2.7	6.8
	IDDHALT(2)		<ul style="list-style-type: none"> <li>• HALT mode</li> <li>• FmCF=8MHz ceramic oscillation mode</li> <li>• FmX'tal=32.768kHz crystal oscillation mode</li> <li>• System clock set to 12MHz side</li> <li>• Internal RC oscillation stopped.</li> <li>• Frequency variable RC oscillation stopped.</li> <li>• 1/1 frequency division ratio</li> </ul>	2.5 to 3.6		1.4	3.1
	IDDHALT(3)		<ul style="list-style-type: none"> <li>• HALT mode</li> <li>• FmCF=0Hz (oscillation stopped)</li> <li>• FmX'tal=32.768kHz crystal oscillation mode</li> <li>• System clock set to internal RC oscillation</li> <li>• Frequency variable RC oscillation stopped.</li> <li>• 1/2 frequency division ratio</li> </ul>	2.5 to 3.6		0.2	0.75
	IDDHALT(4)		<ul style="list-style-type: none"> <li>• HALT mode</li> <li>• FmCF=0Hz (oscillation stopped)</li> <li>• FmX'tal=32.768kHz crystal oscillation mode</li> <li>• Internal RC oscillation stopped.</li> <li>• System clock set to 10MHz with frequency variable RC oscillation</li> <li>• 1/1 frequency division ratio</li> </ul>	2.5 to 3.6		1.6	4.5
	IDDHALT(5)		<ul style="list-style-type: none"> <li>• HALT mode</li> <li>• FmCF=0Hz (oscillation stopped)</li> <li>• FmX'tal=32.768kHz crystal oscillation mode</li> <li>• Internal RC oscillation stopped</li> <li>• System clock set to 4MHz with frequency variable RC oscillation</li> <li>• 1/1 frequency division ratio</li> </ul>	2.5 to 3.6		0.7	1.75
	IDDHALT(6)		<ul style="list-style-type: none"> <li>• HALT mode</li> <li>• FmCF=0Hz (oscillation stopped)</li> <li>• FmX'tal=32.768kHz crystal oscillation mode</li> <li>• System clock set to 32.768kHz side</li> <li>• Internal RC oscillation stopped.</li> <li>• Frequency variable RC oscillation stopped.</li> <li>• 1/2 frequency division ratio</li> </ul>	2.5 to 3.6		12.4	54.9
HOLD mode consumption current	IDDHOLD(1)	V <sub>DD1</sub>	<ul style="list-style-type: none"> <li>• HOLD mode</li> <li>• CF1=V<sub>DD</sub> or open (External clock mode)</li> </ul>	2.5 to 3.6		0.08	18.4
Timer HOLD mode consumption current	IDDHOLD(2)		<ul style="list-style-type: none"> <li>• Timer HOLD mode</li> <li>• CF1=V<sub>DD</sub> or open (External clock mode)</li> <li>• FmX'tal=32.768kHz crystal oscillation mode</li> </ul>	2.5 to 3.6		10.14	34.4

Note 7-1: The consumption current value includes none of the currents that flow into the output Tr and internal pull-up resistors.

## F-ROM Write Characteristics at $T_a = +10^{\circ}\text{C}$ to $+55^{\circ}\text{C}$ , $V_{SS1} = V_{SS2} = V_{SS3} = 0\text{V}$

Parameter	Symbol	Pin/Remarks	Conditions	Specification				
				$V_{DD}$ [V]	min	typ	max	unit
Onboard programming current	IDDFW(1)	$V_{DD1}$	• Without CPU current	3.0 to 3.6		7	11	mA
Programming time	tFW(1)		• 2K-byte erase operation	3.0 to 3.6		12	15	ms
	tFW(2)		• 2K-byte writing operation	3.0 to 3.6		35	45	$\mu\text{s}$

## UART (Full Duplex) Operating Conditions at $T_a = +40$ to $+85^{\circ}\text{C}$ , $V_{SS1} = V_{SS2} = V_{SS3} = 0\text{V}$


Parameter	Symbol	Pin/Remarks	Conditions	Specification				
				$V_{DD}$ [V]	min	typ	max	unit
Transfer rate	UBR	UTX(S32), URX(S33)		2.5 to 3.6	16/3		8192/3	tCYC

Data length : 7/8/9 bits (LSB first)


Stop bits : 1 bit (2-bit in continuous data transmission)

Parity bits : None

Example of 8-bit Data Transmission Mode Processing (Transmit Data=55H)

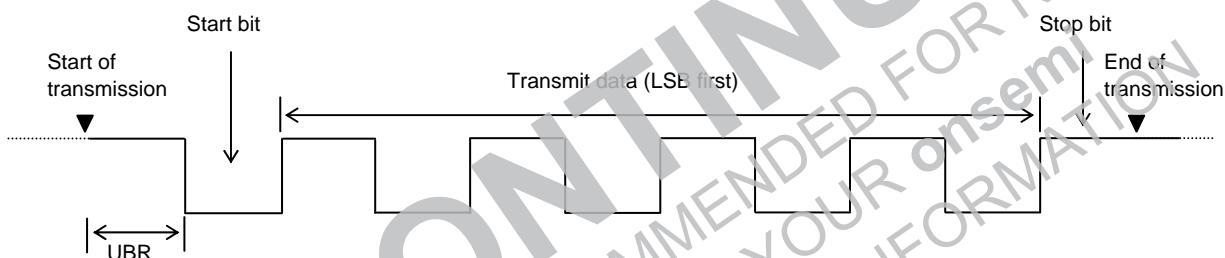

Example of 8-bit Data Reception Mode Processing (Receive Data=55H)

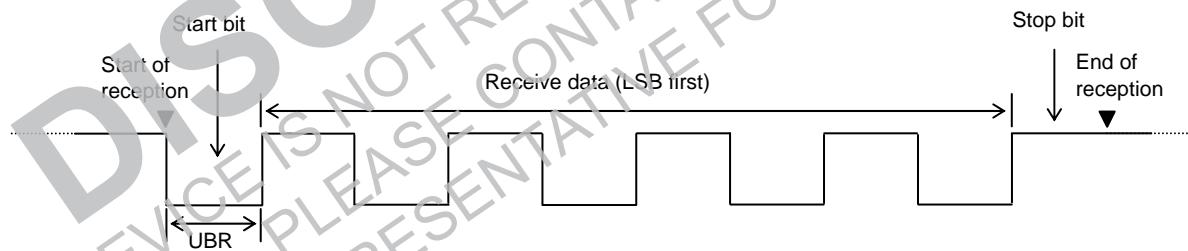

## Characteristics of a Sample Main System Clock Oscillation Circuit

Given below are the characteristics of a sample main system clock oscillation circuit that are measured using a Our designated oscillation characteristics evaluation board and external components with circuit constant values with which the oscillator vendor confirmed normal and stable oscillation.

Table 1 Characteristics of a Sample Main System Clock Oscillator Circuit with a Ceramic Oscillator

Nominal Frequency	Vendor Name	Oscillator Name	Circuit Constant				Operating Voltage Range [V]	Oscillation Stabilization Time		Remarks
			C1 [pF]	C2 [pF]	Rf1 [Ω]	Rd1 [Ω]		typ [ms]	max [ms]	
18MHz	MURATA	CSTCE18M0V51-R0	(5)	(5)	OPEN	150	2.7 to 3.6	0.05	0.15	Values shown in parentheses are capacitance included in the oscillator
		CSTLS18M0X51-B0	(5)	(5)	OPEN	0	2.7 to 3.6	0.11	0.33	
10MHz	MURATA	CSTCE10M00G52-R0	(10)	(10)	OPEN	680	2.5 to 3.6	0.05	0.15	Values shown in parentheses are capacitance included in the oscillator
		CSTLS10M00G53-B0	(15)	(15)	OPEN	1.5k	2.5 to 3.6	0.05	0.15	
8MHz	MURATA	CSTCE8M00G52-R0	(10)	(10)	OPEN	680	2.5 to 3.6	0.05	0.15	Values shown in parentheses are capacitance included in the oscillator
		CSTLS8M00G53-B0	(15)	(15)	OPEN	1.5k	2.5 to 3.6	0.05	0.15	

The oscillation stabilization time refers to the time interval that is required for the oscillation to get stabilized after VDD goes above the operating voltage lower limit (see Figure 4).

## Characteristics of a Sample Subsystem Clock Oscillator Circuit

Given below are the characteristics of a sample subsystem clock oscillation circuit that are measured using a Our designated oscillation characteristics evaluation board and external components with circuit constant values with which the oscillator vendor confirmed normal and stable oscillation.

Table 2 Characteristics of a Sample Subsystem Clock Oscillation Circuit with a Crystal Oscillation

Nominal Frequency	Vendor Name	Oscillator Name	Circuit Constant				Operating Voltage Range [V]	Oscillation Stabilization Time		Remarks
			C3 [pF]	C4 [pF]	Rf2 [Ω]	Rd2 [Ω]		typ [s]	max [s]	
32.768kHz	EPSON TOYOCOM	MC-300	9	9	Open	330k	2.5 to 3.6	1.0	3.0	CL=7.0pF

The oscillation stabilization time refers to the time interval that is required for the oscillation to get stabilized after the instruction for starting the subclock oscillation circuit is executed and to the time interval that is required for the oscillation to get stabilized after the HOLD mode is reset (see Fig. 4).

Caution: The components that are involved in oscillation should be placed as close to the IC and to one another as possible because they are vulnerable to the influences of the circuit pattern.

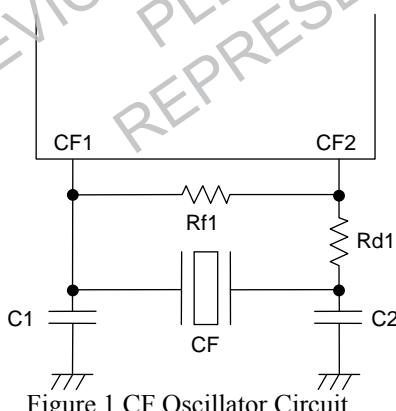


Figure 1 CF Oscillator Circuit

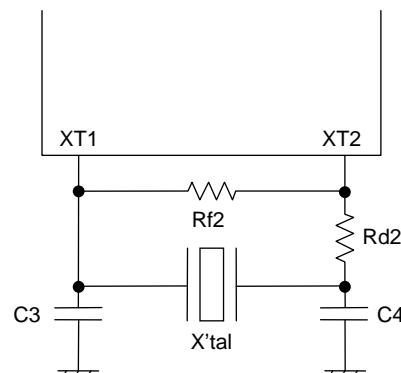


Figure 2 XT Oscillator Circuit






Figure 3 AC Timing Measurement Point

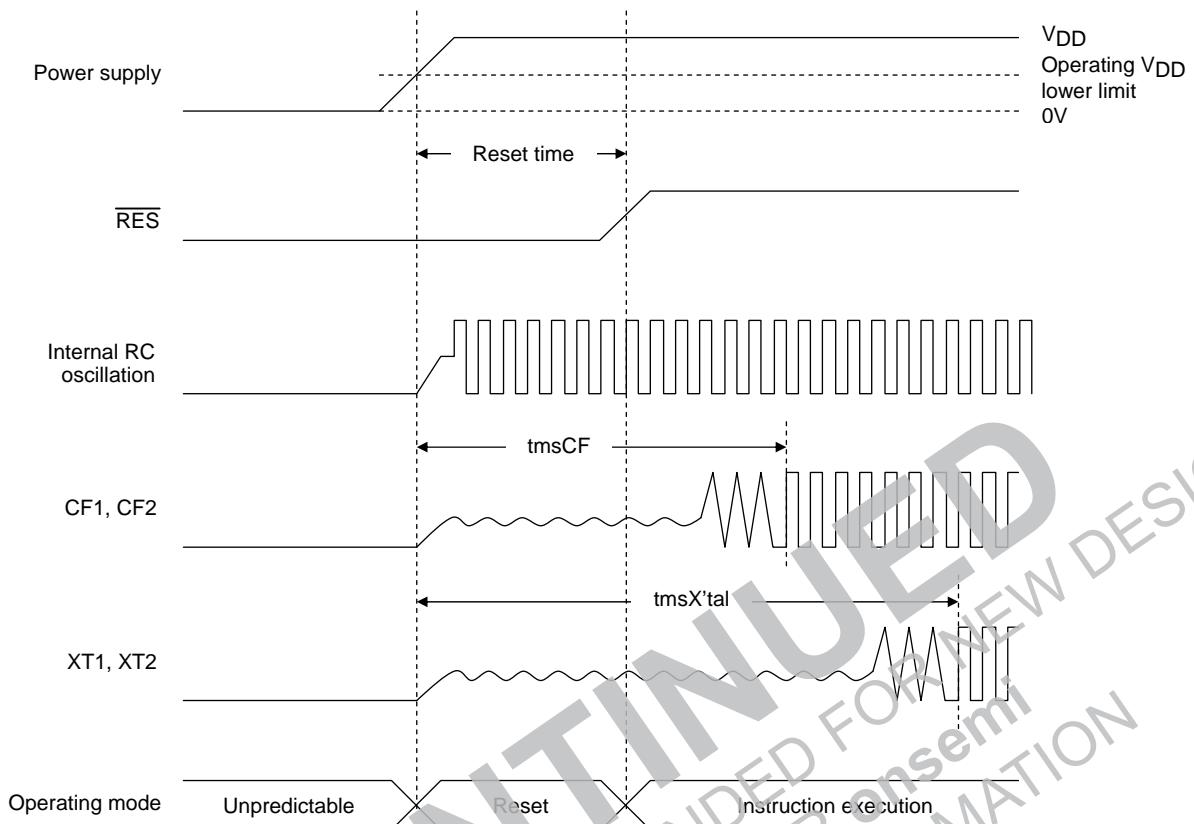


Reset Time and Oscillation Stabilization Time

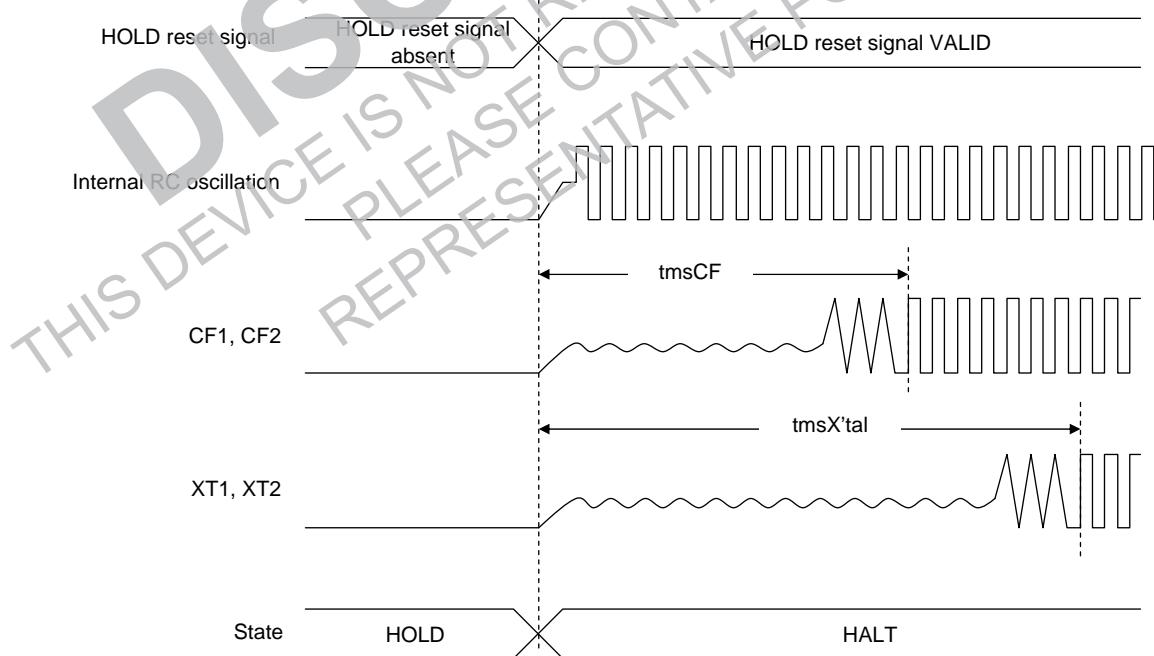

HOLD Reset Signal and Oscillation Stabilization Time

Figure 4 Oscillation Stabilization Times

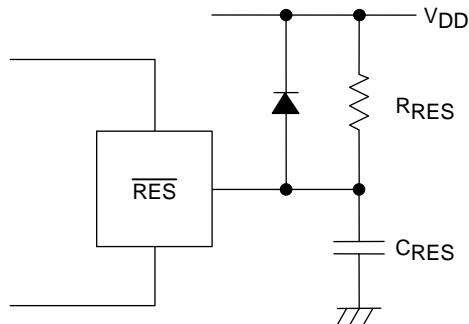

Note :

Determine the value of  $C_{RES}$  and  $R_{RES}$  so that the reset signal is present for a period of 200 $\mu$ s after the supply voltage goes beyond the lower limit of the IC's operating voltage.

Figure 5 Reset Circuit

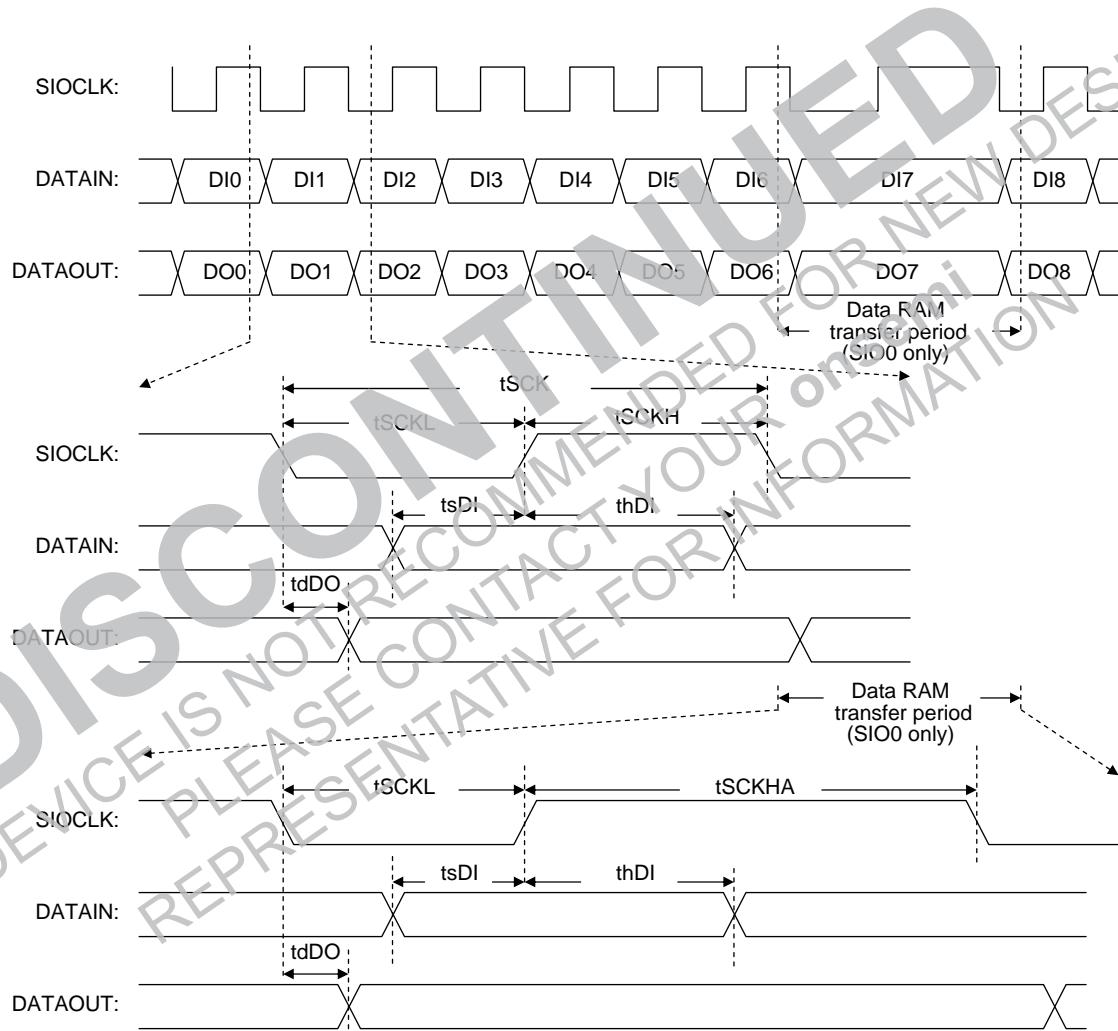


Figure 6 Serial I/O Waveforms

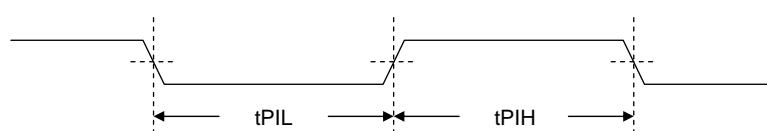


Figure 7 Pulse Input Timing Signal Waveform

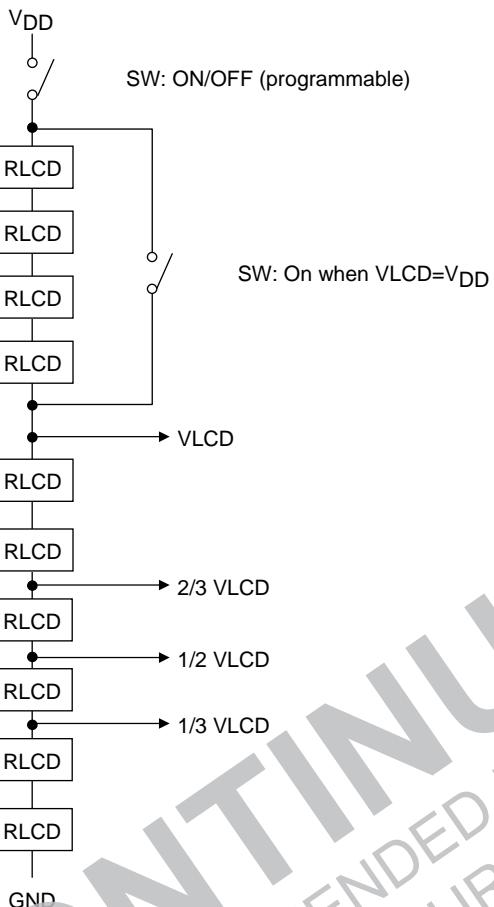


Figure 8 LCD bias resistor

## ORDERING INFORMATION

Device	Package	Shipping (Qty / Packing)
LC87F7NC8AUEJ-2H	QIP100E(14x20) (Pb-Free / Halogen Free)	50 / Tray Foam
LC87F7NC8AVIUEJ-2H	QIP100E(14x20) (Pb-Free / Halogen Free)	50 / Tray Foam

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.