Thank you for your interest in **onsemi** products.

Your technical document begins on the following pages.



Your Feedback is Important to Us!

Please take a moment to participate in our short survey. At **onsemi**, we are dedicated to delivering technical content that best meets your needs.

Help Us Improve - Take the Survey

This survey is intended to collect your feedback, capture any issues you may encounter, and to provide improvements you would like to suggest.

We look forward to your feedback.

To learn more about **onsemi**, please visit our website at <u>www.onsemi.com</u>

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All opreating parameters, including "Typicals" must be validated for each customer application in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and ereasnable attorney fees arising out of, directly or indirectly, any claim of personal injury or death Action Employer. This literature is subject to all applicatione claimed as not for resale in any manner. Other names and brands may be claimed as the property of others.

Axial Lead Rectifiers

SCHOTTKY BARRIER RECTIFIERS 1.0 AMPERE 20, 30 and 40 VOLTS

1N5817, 1N5818, 1N5819

This series employs the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features chrome barrier metal, epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free wheeling diodes, and polarity protection diodes.

Features


- Extremely Low V_F
- Low Stored Charge, Majority Carrier Conduction
- Low Power Loss/High Efficiency
- These are Pb–Free Devices*

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 0.4 Gram (Approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max for 10 Seconds
- Polarity: Cathode Indicated by Polarity Band
- ESD Ratings: Machine Model = C (>400 V) Human Body Model = 3B (>8000 V)







A	=Assembly Location
1N581x	=Device Number
	x= 7, 8, or 9
YY	=Year
WW	=Work Week
-	=Pb-Free Package
(Note: Microde	ot may be in either location)

ORDERING INFORMATION

See detailed ordering and shipping information on page 6 of this data sheet.

*For additional information on our Pb–Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

1N5817, 1N5818, 1N5819

MAXIMUM RATINGS

Rating	Symbol	1N5817	1N5818	1N5819	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	20	30	40	V
Non-Repetitive Peak Reverse Voltage	V _{RSM}	24	36	48	V
RMS Reverse Voltage	V _{R(RMS)}	14	21	28	V
Average Rectified Forward Current (Note 1), ($V_{R(equiv)} \le 0.2 V_{R}(dc)$, $T_{L} = 90^{\circ}C$, $R_{\theta JA} = 80^{\circ}C/W$, P.C. Board Mounting, see Note 2, $T_{A} = 55^{\circ}C$)	I _O 1.0		A		
Ambient Temperature (Rated V _R (dc), P _{F(AV)} = 0, R _{θJA} = 80°C/W)	T _A	85	80	75	°C
Non–Repetitive Peak Surge Current, (Surge applied at rated load conditions, half–wave, single phase 60 Hz, T_L = 70°C)		25	(for one cy	cle)	A
Operating and Storage Junction Temperature Range (Reverse Voltage applied)	T _J , T _{stg}	T _J , T _{stg} –65 to +125		°C	
Peak Operating Junction Temperature (Forward Current applied)			150		°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS (Note 1)

Characteristic	Symbol	Мах	Unit
Thermal Resistance, Junction-to-Ambient	R_{\thetaJA}	80	°C/W

ELECTRICAL CHARACTERISTICS ($T_L = 25^{\circ}C$ unless otherwise noted) (Note 1)

Characteristic		Symbol	1N5817	1N5818	1N5819	Unit
Maximum Instantaneous Forward Voltage (Note 2)	(i _F = 0.1 A) (i _F = 1.0 A) (i _F = 3.0 A)	۷ _F	0.32 0.45 0.75	0.33 0.55 0.875	0.34 0.6 0.9	V
Maximum Instantaneous Reverse Current @ Rated dc Voltage (N	ote 2) (T _L = 25°C) (T _L = 100°C)	I _R	1.0 10	1.0 10	1.0 10	mA

1. Lead Temperature reference is cathode lead 1/32 in from case.

2. Pulse Test: Pulse Width = 300 μ s, Duty Cycle = 2.0%.

(3)

NOTE 3. — DETERMINING MAXIMUM RATINGS

Reverse power dissipation and the possibility of thermal runaway must be considered when operating this rectifier at reverse voltages above 0.1 V_{RWM} . Proper derating may be accomplished by use of equation (1).

$T_{A(max)} = T_{J(max)} - R_{\theta JA}P_{F(AV)} - R_{\theta JA}P_{R(AV)}$	(1)
where $T_{A(max)}$ = Maximum allowable ambient temperature	
T _{J(max)} = Maximum allowable junction temperature	
(125°C or the temperature at which thermal	
runaway occurs, whichever is lowest)	
P _{F(AV)} = Average forward power dissipation	
$P_{R(AV)}$ = Average reverse power dissipation	
$R_{\theta JA}$ = Junction-to-ambient thermal resistance	
Γ_{i} and $1, 2, \dots, 1, 2$ and i the set of the set of (1)	1

Figures 1, 2, and 3 permit easier use of equation (1) by taking reverse power dissipation and thermal runaway into consideration. The figures solve for a reference temperature as determined by equation (2).

$$T_{R} = T_{J(max)} - R_{\theta JA} P_{R(AV)}$$
(2)

Substituting equation (2) into equation (1) yields:

 $T_{A(max)} = T_{R} - R_{\theta JA} P_{F(AV)}$

Inspection of equations (2) and (3) reveals that T_R is the ambient temperature at which thermal runaway occurs or where $T_J = 125^{\circ}$ C, when forward power is zero. The transition from one boundary condition to the other is evident on the curves of Figures 1, 2, and 3 as a difference in the rate of change of the slope in the vicinity of 115°C. The data of Figures 1, 2, and 3 is based upon dc conditions. For use in common rectifier circuits, Table 1 indicates suggested factors for an equivalent dc voltage to use for conservative design, that is:


$$V_{R(equiv)} = V_{in(PK)} \times F$$
 (4)

The factor F is derived by considering the properties of the various rectifier circuits and the reverse characteristics of Schottky diodes.

EXAMPLE: Find $T_{A(max)}$ for 1N5818 operated in a 12-volt dc supply using a bridge circuit with capacitive filter such that $I_{DC} = 0.4 \text{ A} (I_{F(AV)} = 0.5 \text{ A}), I_{(FM)}/I_{(AV)} = 10$, Input Voltage = 10 V_(rms), $R_{\theta JA} = 80^{\circ}$ C/W.

Step 4. Find $T_{A(max)}$ from equation (3). $T_{A(max)} = 109 - (80) (0.5) = 69^{\circ}C.$

**Values given are for the 1N5818. Power is slightly lower for the 1N5817 because of its lower forward voltage, and higher for the 1N5819.

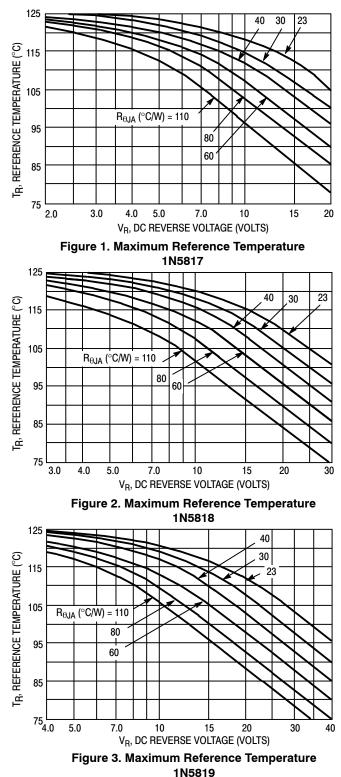

Circuit Half		Wave	Full Wave, Bridge		Full Wave, Ce	nter Tapped*†
Load	Resistive	Capacitive*	Resistive	Capacitive	Resistive	Capacitive
Sine Wave	0.5	1.3	0.5	0.65	1.0	1.3
Square Wave	0.75	1.5	0.75	0.75	1.5	1.5

**Note that $V_{R(PK)} \approx 2.0 V_{in(PK)}$.

†Use line to center tap voltage for Vin.


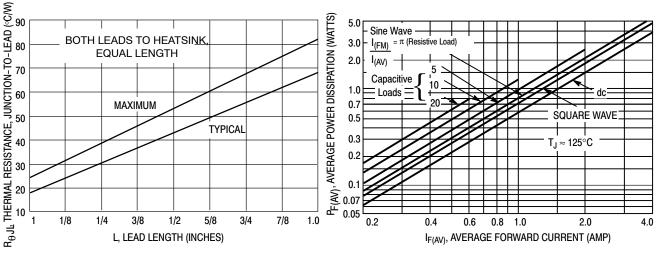




Figure 5. Forward Power Dissipation 1N5817–19



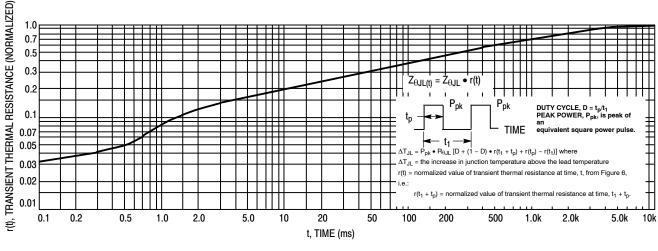

NOTE 4. — MOUNTING DATA


Data shown for thermal resistance, junction–to–ambient $(R_{\theta JA})$ for the mountings shown is to be used as typical guideline values for preliminary engineering, or in case the tie point temperature cannot be measured.

TYPICAL VALUES FOR $\textbf{R}_{\theta \textbf{JA}}$ IN STILL AIR

Mounting	Lead Length, L (in)				
Method	1/8	1/4	1/2	3/4	R _{θJA}
1	52	65	72	85	°C/W
2	67	80	87	100	°C/W
3		Ę	50		°C/W


Mounting Method 1

P.C. Board with $1-1/2'' \ge 1-1/2''$ copper surface.






P.C. Board with 1-1/2" x 1-1/2" copper surface.








VECTOR PIN MOUNTING

www.onsemi.com

1N5817, 1N5818, 1N5819

NOTE 5. — THERMAL CIRCUIT MODEL

(For heat conduction through the leads)

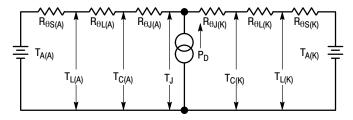


Use of the above model permits junction to lead thermal resistance for any mounting configuration to be found. For a given total lead length, lowest values occur when one side of the rectifier is brought as close as possible to the heatsink. Terms in the model signify:

T_C = Case Temperature

T_A = Ambient Temperature

(Subscripts A and K refer to anode and cathode sides, respectively.) Values for thermal resistance components are: $R_{\theta L} = 100^{\circ}$ C/W/in typically and 120°C/W/in maximum $R_{\theta J} = 36^{\circ}$ C/W typically and 46°C/W maximum.

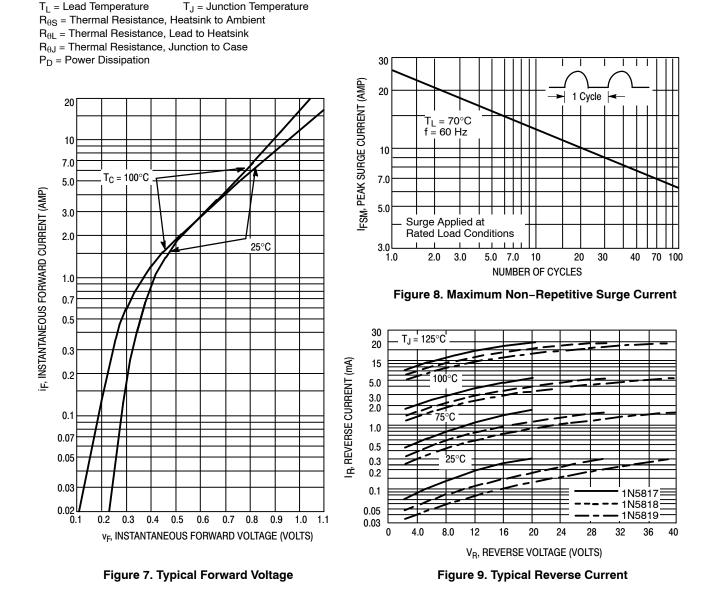

NOTE 6. — HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 10.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 percent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss: it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.




Figure 10. Typical Capacitance

ORDERING INFORMATION


Device	Package	Shipping [†]
1N5817	Axial Lead*	1000 Units / Bag
1N5817G	Axial Lead*	1000 Units / Bag
1N5817RL	Axial Lead*	5000 / Tape & Reel
1N5817RLG	Axial Lead*	5000 / Tape & Reel
1N5818	Axial Lead*	1000 Units / Bag
1N5818G	Axial Lead*	1000 Units / Bag
1N5818RL	Axial Lead*	5000 / Tape & Reel
1N5818RLG	Axial Lead*	5000 / Tape & Reel
1N5819	Axial Lead*	1000 Units / Bag
1N5819G	Axial Lead*	1000 Units / Bag
1N5819RL	Axial Lead*	5000 / Tape & Reel
1N5819RLG	Axial Lead*	5000 / Tape & Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

*This package is inherently Pb-Free.

onsemi

not follow the Generic Marking.

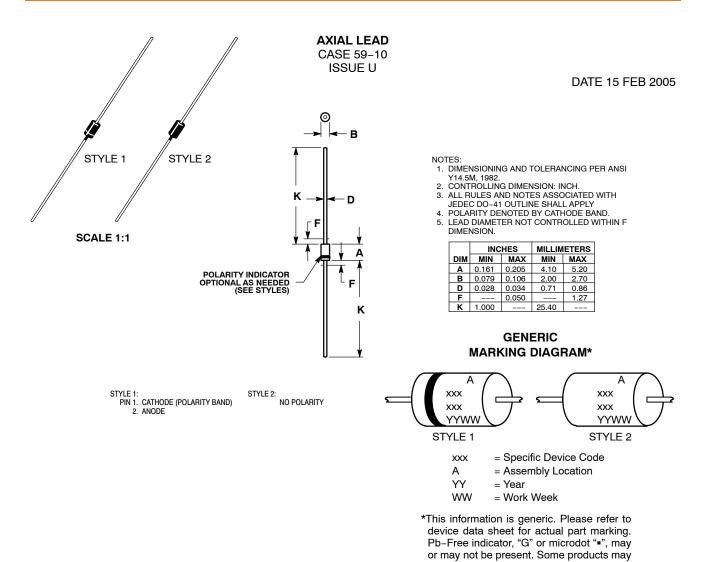

DOCUMENT NUMBER:	98ASB42045B Electronic versions are uncontrolled except when accessed directly from the Document Reposite Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	AXIAL LEAD		PAGE 1 OF 1

onsemi and ONSEMi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>